




ING-SMINI

Recessed Inground Floor from the family ING-SMINI with a power of 2W and a beam angle of 10 degrees. With a real lumen output of 136 lm, and an efficiency of 68lm/W, made in Die Cast Aluminium Body, Front Ring Stainless Steel, Tempered Glass Cover and finished in Stainless Steel. IP67 and IK07 degree of protection. ON-OFF driver.

Scheme

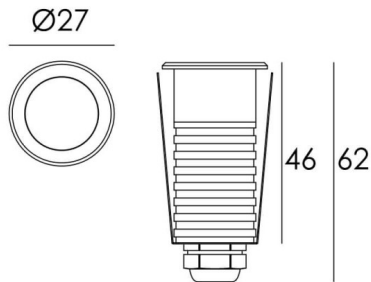

Item code	86.OI18.1311.00			
Product type	Outdoor			
Category	Recessed Inground Floor			
Family	ING-SMINI			
Pictograms				

Product	
Real power (W)	2
Real luminous flux (Lm)	136
Luminous efficiency (Lm/W)	68
Beam angle (º)	10
Life time (h)	50000h L80B10
IP	67
Electrical class insulation	Class I
Colour	Stainless steel finishing
Control gear included	No
Light source	LED
Colour temperature (K)	3000
Colour consistency (SDCM)	SDCM<3
CRI	80
IK	07