




ING-SMINI

Recessed Inground Floor from the family ING-SMINI with a power of 2W and a beam angle of 30 degrees. With a real lumen output of 136 lm, and an efficiency of 68lm/W, made in Die Cast Aluminium Body, Front Ring Stainless Steel, Tempered Glass Cover and finished in Stainless Steel. IP67 and IK07 degree of protection. driver excl.

Scheme

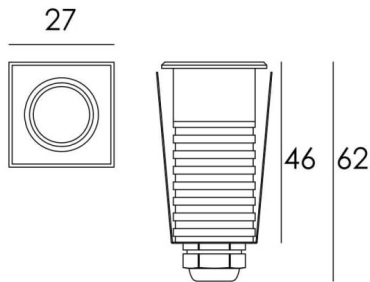

Item code	86.OI18.2331.00
Product type	Outdoor
Category	Recessed Inground Floor
Family	ING-SMINI
Pictograms	

Product	
Real power (W)	2
Real luminous flux (Lm)	136
Luminous efficiency (Lm/W)	68
Beam angle (°)	30
Life time (h)	50000h L80B10
IP	67
Electrical class insulation	Class I
Colour	Stainless steel finishing
Control gear included	No
Light source	LED
Colour temperature (K)	3000
Colour consistency (SDCM)	SDCM3
CRI	80
IK	07