


Dimensions

Product dimensions (mm) $\varnothing 130 \times 133 \text{ mm}$

Scheme

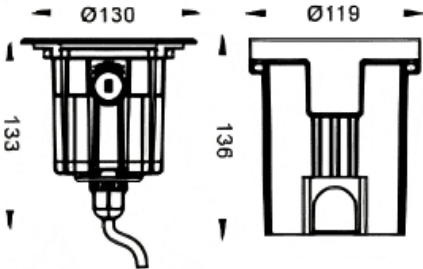

Photometry

ING-AD

Lavov recessed inground floor from the family ING-AD adjustable, with a power of 5.3W and a 40 degrees beam angle. Finished in Stainless steel colour. Dimensions $\varnothing 130 \times 133 \text{ mm}$. With a total lumen output of 465lm and a luminous efficiency of 87.73lm/W. CCT 3000. Driver ON-OFF. Made in Die Cast Aluminium Body, Front Ring stainless Steel, Tempered Glass Cover. IP67. IK10

Item code	86.OI20.2341.07
Product type	Outdoor
Category	Recessed Inground Floor
Family	ING
Subfamily	ING-AD
Pictograms	<div><div></div><div>50 60 Hz</div><div>220 240 V</div><div></div><div>IK 10</div><div>CRI 80</div><div>SDCM 3</div><div>CE</div><div>Driver INCL.</div><div></div><div>IP 66</div><div>50000h L80B10</div></div>

Product	
Real power (W)	5.3
Real luminous flux (Lm)	465
Luminous efficiency (Lm/W)	87.73
Beam angle (°)	40
Life time (h)	50000h L80B10
IP	67
Electrical class insulation	Class I
Colour	Stainless steel
Control gear included	Yes
Control gear	ON-OFF
Light source	2x3W CREE
Colour temperature (K)	3000
Colour consistency (SDCM)	SDCM<3
CRI	80
IK	IK10

