




ING-AD

Lavov recessed in-ground floor from the family ING-AD adjustable, with a power of 37.6W and a 8 degrees beam angle. Finished in Stainless steel colour.Dimensions ø250x190mm. With a total lumen output of 2800lm and a luminous efficiency of 74.5lm/W. CCT 3000. Driver ON-OFF. Made in Die Cast Aluminium Body, Front Ring stainless Steel, Tempered Glass Cover. IP67. IK10

Dimensions	
Product dimensions (mm)	ø250x190mm
Scheme	

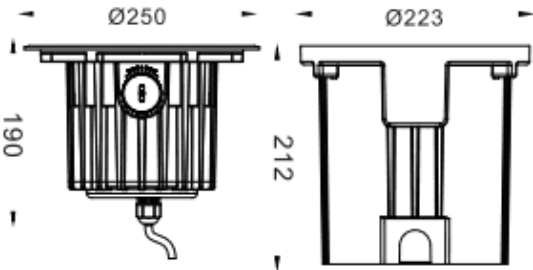

Item code	86.OI20.6321.07				
Product type	Outdoor				
Category	Recessed Inground Floor				
Family	ING				
Subfamily	ING-AD				
Pictograms		50 60 Hz	220 240 V	 850°	IK 10
	CRI 80	SDCM 3	CE	Driver INCL.	
	IP 66	50000h L80B10			

Product	
Real power (W)	37.6
Real luminous flux (Lm)	2800
Luminous efficiency (Lm/W)	74.5
Beam angle (°)	8
Life time (h)	50000h L80B10
IP	67
Electrical class insulation	Class I
Colour	Stainless steel
Control gear included	Yes
Control gear	ON-OFF
Light source	18X2W CREE
Colour temperature (K)	3000
Colour consistency (SDCM)	SDCM<3
CRI	80
IK	IK10