


ING-AD

Lavov recessed inground floor from the family ING-AD adjustable, with a power of 37,6W and a 25 degrees beam angle. Finished in Stainless steel colour.Dimensions ø250x190mm. With a total lumen output of 2800lm and a luminous efficiency of 74,5lm/W. CCT 3000. Driver ON-OFF. Made in Die Cast Aluminium Body, Front Ring stainless Steel, Tempered Glass Cover. IP67. IK10

Item code	**86.OI20.6331.07**
Product type	**Outdoor**
Category	**Recessed Inground Floor**
Family	**ING**
Subfamily	**ING-AD**
Pictograms	


Dimensions	
Product dimensions (mm)	**ø250x190mm**

Scheme

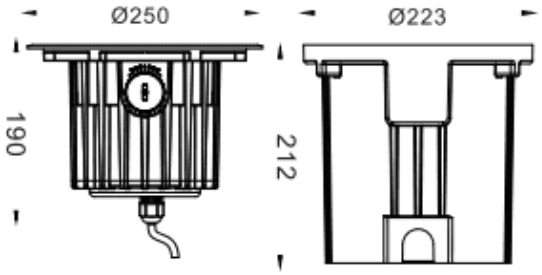

Product	
Real power (W)	**37.6**
Real luminous flux (Lm)	**2800**
Luminous efficiency (Lm/W)	**74.5**
Beam angle (º)	**25**
Life time (h)	**50000h L80B10**
IP	**67**
Electrical class insulation	**Class I**
Colour	**Stainless steel**
Control gear included	**Yes**
Control gear	**ON-OFF**
Light source	**18X2W CREE**
Colour temperature (K)	**3000**
Colour consistency (SDCM)	**SDCM3**
CRI	**80**
IK	**IK10**

Photometry

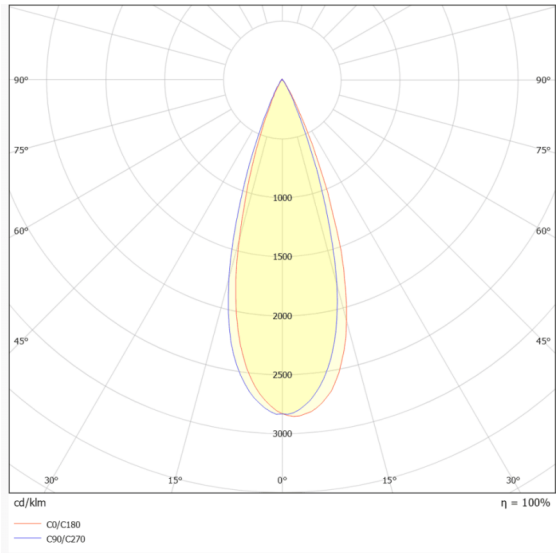
90°
90°
75°
75°
60°
60°
45°
45°
1000
1500
2000
2500
3000
30°
15°
0°
15°
30°
cd/klm
η = 100%
C0/C180
C90/C270