


## ING-AD

Lavov recessed inground floor from the family ING-AD adjustable, with a power of 37,6W and a 40 degrees beam angle. Finished in Stainless steel colour.Dimensions ø250x190mm. With a total lumen output of 2800lm and a luminous efficiency of 74,5lm/W. CCT 3000. Driver ON-OFF. Made in Die Cast Aluminium Body, Front Ring stainless Steel, Tempered Glass Cover. IP67. IK10

| | |
|---|---|
| **Item code** | **86.OI20.6341.07** |
| **Product type** | **Outdoor** |
| **Category** | **Recessed Inground Floor** |
| **Family** | **ING** |
| **Subfamily** | **ING-AD** |
| **Pictograms** |  |

| **Dimensions** | |
|---|---|
| **Product dimensions (mm)** | **ø250x190mm** |

**Scheme**

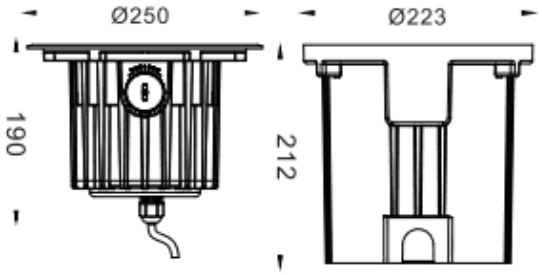


| **Product** | |
|---|---|
| **Real power (W)** | **37.6** |
| **Real luminous flux (Lm)** | **2800** |
| **Luminous efficiency (Lm/W)** | **74.5** |
| **Beam angle (º)** | **40** |
| **Life time (h)** | **50000h L80B10** |
| **IP** | **67** |
| **Electrical class insulation** | **Class I** |
| **Colour** | **Stainless steel** |
| **Control gear included** | **Yes** |
| **Control gear** | **ON-OFF** |
| **Light source** | **18X2W CREE** |
| **Colour temperature (K)** | **3000** |
| **Colour consistency (SDCM)** | **SDCM3** |
| **CRI** | **80** |
| **IK** | **IK10** |