




ING-MINI

Lavov recessed in-ground floor from the family ING-MINI, with a power of 5W and a 36 degrees beam angle. Finished in Stainless steel colour. Dimensions $\varnothing 70 \times 82 \text{mm}$. With a total lumen output of 508lm and a luminous efficiency of 101lm/W. CCT 3000. Driver ON-OFF. Made in Die Cast Aluminium Body, Front Ring stainless Steel, Tempered Glass Cover. IP67. IK09

Dimensions

Product dimensions (mm) $\varnothing 70 \times 82 \text{mm}$

Scheme

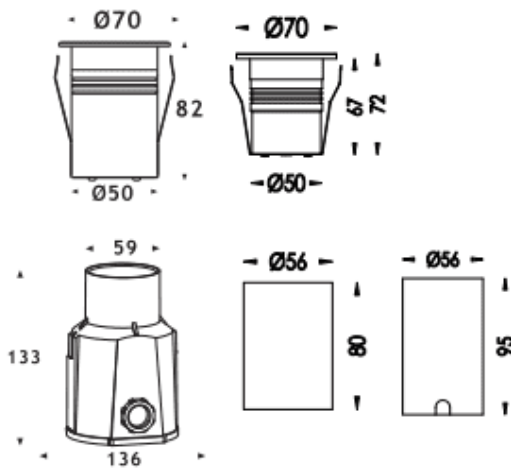

Photometry

| | |
|---------------------|--------------------------------|
| Item code | 86.OIN1.1331.07 |
| Product type | Outdoor |
| Category | Recessed Inground Floor |
| Family | ING |
| Subfamily | ING-MINI |
| Pictograms | |

| | |
|------------------------------------|------------------------|
| Product | |
| Real power (W) | 5 |
| Real luminous flux (Lm) | 508 |
| Luminous efficiency (Lm/W) | 101 |
| Beam angle (°) | 36 |
| Life time (h) | 50000h L80B10 |
| IP | 67 |
| Electrical class insulation | Class I |
| Colour | Stainless steel |
| Control gear included | Yes |
| Control gear | ON-OFF |
| Light source | 1x5W COB |
| Colour temperature (K) | 3000 |
| Colour consistency (SDCM) | SDCM3 |
| CRI | 80 |
| IK | IK09 |

