





Scheme





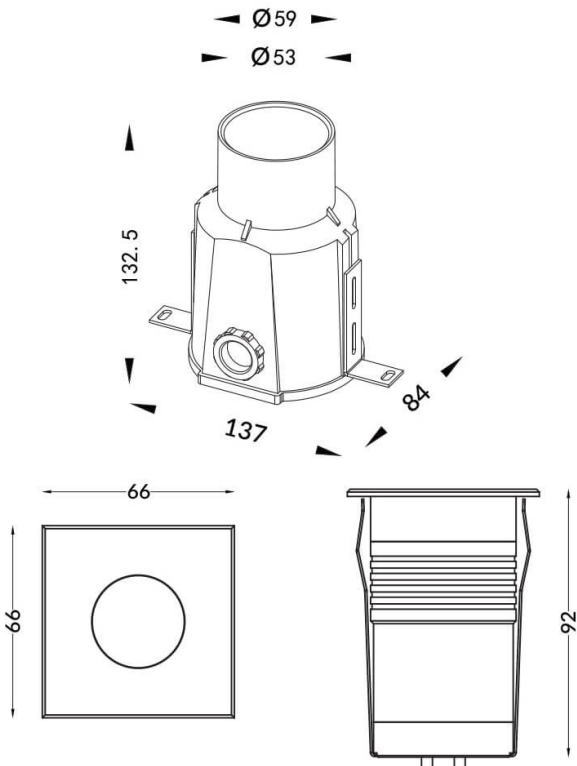

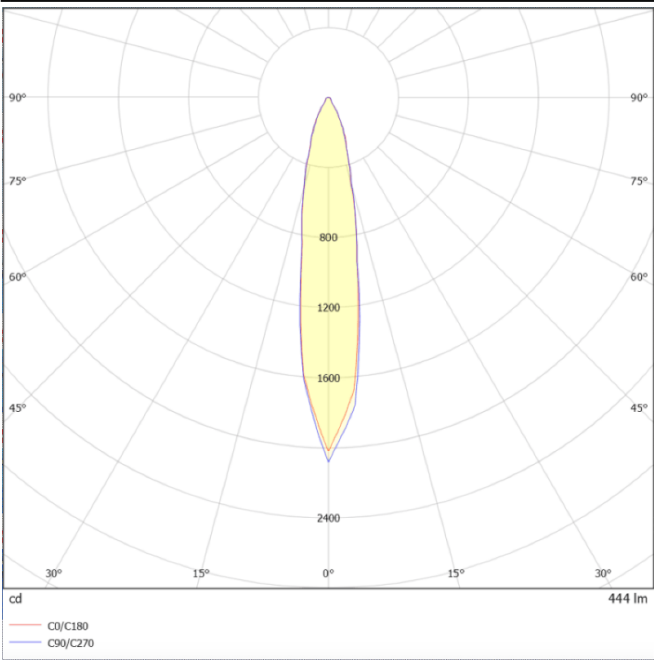





Photometry



ING-MINI

Recessed Inground Floor from the family ING-MINI with a power of 6,7W and a beam angle of 18 degrees. with a real lumen output of 442 lm, and an efficiency of 65,97 lm/W, made in Die Cast Aluminium Body, Front Ring Stainless Steel. , Tempered Glass Cover and finished in Stainless Steel. ON-OFF driver.

| | |
|--------------|---|
| Item code | 86.OIN1.2311.07 |
| Product type | Outdoor |
| Category | Recessed Inground Floor |
| Family | ING |
| Subfamily | ING-MINI |
| Pictograms | <div><div>50 60 Hz</div><div>220 240 V</div><div>850°</div><div>CRI 80</div></div> <div><div>SDCM 3</div><div>CE</div><div>Driver INCL.</div><div>50000h L80B10</div></div> <div><div>IP 65</div><div>IK 08</div></div> |

| | |
|-----------------------------|-----------------|
| Product | |
| Real power (W) | 6.7 |
| Real luminous flux (Lm) | 442 |
| Luminous efficiency (Lm/W) | 65.97 |
| Beam angle (°) | 18 |
| Life time (h) | 50000h L80B10 |
| IP | 67 |
| Electrical class insulation | Class I |
| Colour | Stainless steel |
| Control gear included | Yes |
| Control gear | ON-OFF |
| Light source | 1x5W COB |
| Colour temperature (K) | 3000 |
| Colour consistency (SDCM) | SDCM<3 |
| CRI | 80 |
| IK | 07 |