




Dimensions



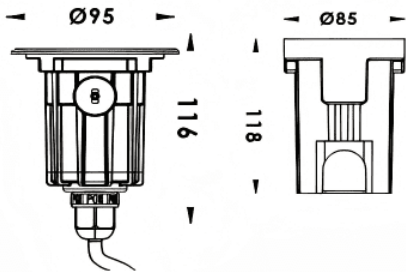

Product dimensions (mm) $\varnothing 95 \times 116 \text{ mm}$

Scheme



ING-S

Lavov recessed in-ground floor from the family ING-S, with a power of 2.5W and a 15 degrees beam angle. Finished in Stainless steel colour. Dimensions $\varnothing 95 \times 116 \text{ mm}$. With a total lumen output of 145lm and a luminous efficiency of 58lm/W. CCT 3000. Driver ON-OFF. Made in Die Cast Aluminium Body, Front Ring stainless Steel, Tempered Glass Cover. IP67. IK10

| | | | | | | |
|--------------|---|------------------|--------------|---|-----------------|--|
| Item code | 86.OIN2.0311.07 | | | | | |
| Product type | Outdoor | | | | | |
| Category | Recessed Inground Floor | | | | | |
| Family | ING | | | | | |
| Subfamily | ING-S | | | | | |
| Pictograms |  | 50 60 Hz | 220 240 V |  850° | IK 09 | |
| | IK 10 | CRI 80 | SDCM 3 |  | Driver INCL. | |
| |  | 50000h L80B10 | IP 67 | | | |

| | |
|-----------------------------|-----------------|
| Product | |
| Real power (W) | 2.5 |
| Real luminous flux (Lm) | 145 |
| Luminous efficiency (Lm/W) | 58 |
| Beam angle (°) | 15 |
| Life time (h) | 50000h L80B10 |
| IP | 67 |
| Electrical class insulation | Class I |
| Colour | Stainless steel |
| Control gear included | Yes |
| Control gear | ON-OFF |
| Light source | 2W Osram |
| Colour temperature (K) | 3000 |
| Colour consistency (SDCM) | SDCM<3 |
| CRI | 80 |
| IK | IK10 |