




### ING-S

Lavov recessed inground floor from the family ING-S, with a power of 2.5W and a 40 degrees beam angle. Finished in Stainless steel colour. Dimensions  $\varnothing 95 \times 116 \text{mm}$ . With a total lumen output of 145lm and a luminous efficiency of 58lm/W. CCT 3000. Driver ON-OFF. Made in Die Cast Aluminium Body, Front Ring stainless Steel, Tempered Glass Cover. IP67. IK10

#### Dimensions

Product dimensions (mm)  $\varnothing 95 \times 116 \text{mm}$

#### Scheme

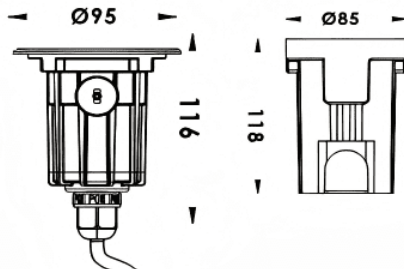

|              |                         |
|--------------|-------------------------|
| Item code    | 86.OIN2.0331.07         |
| Product type | Outdoor                 |
| Category     | Recessed Inground Floor |
| Family       | ING                     |
| Subfamily    | ING-S                   |
| Pictograms   |                         |

|                             |                 |
|-----------------------------|-----------------|
| Product                     |                 |
| Real power (W)              | 2.5             |
| Real luminous flux (Lm)     | 145             |
| Luminous efficiency (Lm/W)  | 58              |
| Beam angle (°)              | 40              |
| Life time (h)               | 50000h L80B10   |
| IP                          | 67              |
| Electrical class insulation | Class I         |
| Colour                      | Stainless steel |
| Control gear included       | Yes             |
| Control gear                | ON-OFF          |
| Light source                | LED             |
| Type of LED                 | 2W Osram        |
| Colour temperature (K)      | 3000            |
| Colour consistency (SDCM)   | SDCM3           |
| CRI                         | 80              |
| IK                          | IK10            |