




### ING-S


Lavov recessed inground floor from the family ING-S, with a power of 2.5W and a 60 degrees beam angle. Finished in Stainless steel colour. Dimensions ø95x116mm. With a total lumen output of 145lm and a luminous efficiency of 58lm/W. CCT 3000. Driver ON-OFF. Made in Die Cast Aluminium Body, Front Ring stainless Steel, Tempered Glass Cover. IP67. IK10

### Dimensions

**Product dimensions (mm)** ø95x116mm

### Scheme

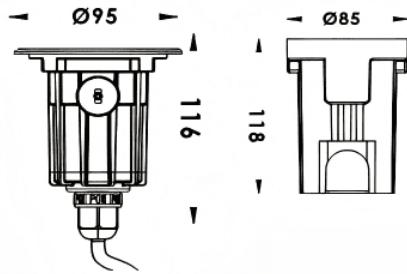

|                     |                                                                                      |
|---------------------|--------------------------------------------------------------------------------------|
| <b>Item code</b>    | 86.OIN2.0341.07                                                                      |
| <b>Product type</b> | Outdoor                                                                              |
| <b>Category</b>     | Recessed Inground Floor                                                              |
| <b>Family</b>       | ING                                                                                  |
| <b>Subfamily</b>    | ING-S                                                                                |
| <b>Pictograms</b>   |  |

### Product

|                                    |                 |
|------------------------------------|-----------------|
| <b>Real power (W)</b>              | 2.5             |
| <b>Real luminous flux (Lm)</b>     | 145             |
| <b>Luminous efficiency (Lm/W)</b>  | 58              |
| <b>Beam angle (°)</b>              | 60              |
| <b>Life time (h)</b>               | 50000h L80B10   |
| <b>IP</b>                          | 67              |
| <b>Electrical class insulation</b> | Class I         |
| <b>Colour</b>                      | Stainless steel |
| <b>Control gear included</b>       | Yes             |
| <b>Control gear</b>                | ON-OFF          |
| <b>Light source</b>                | 2W Osram        |
| <b>Colour temperature (K)</b>      | 3000            |
| <b>Colour consistency (SDCM)</b>   | SDCM<3          |
| <b>CRI</b>                         | 80              |
| <b>IK</b>                          | IK10            |