ING-M

Lavov recessed inground floor from the family ING-M, with a power of 13W and a 15 degrees beam angle. Finished in Stainless steel colour.Dimensions ø116x98mm. With a total lumen output of 1325lm and a luminous efficiency of 101lm/W. CCT 3000. Driver ON-OFF. Made in Die Cast Aluminium Body, Front Ring stainless Steel, Tempered Glass Cover. IP67. IK09

Item code	**86.OIN3.1311.07**
Product type	**Outdoor**
Category	**Recessed Inground Floor**
Family	**ING**
Subfamily	**ING-M**
Pictograms	

Dimensions	
Product dimensions (mm)	**ø116x98mm**

Scheme

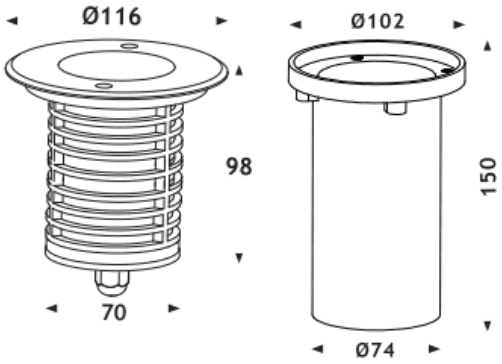

Product	
Real power (W)	**13**
Real luminous flux (Lm)	**1325**
Luminous efficiency (Lm/W)	**101**
Beam angle (º)	**15**
Life time (h)	**50000h L80B10**
IP	**67**
Electrical class insulation	**Class I**
Colour	**Stainless steel**
Control gear included	**Yes**
Control gear	**ON-OFF**
Light source	**1x13W CREE COB**
Colour temperature (K)	**3000**
Colour consistency (SDCM)	**SDCM3**
CRI	**80**
IK	**IK09**

Photometry

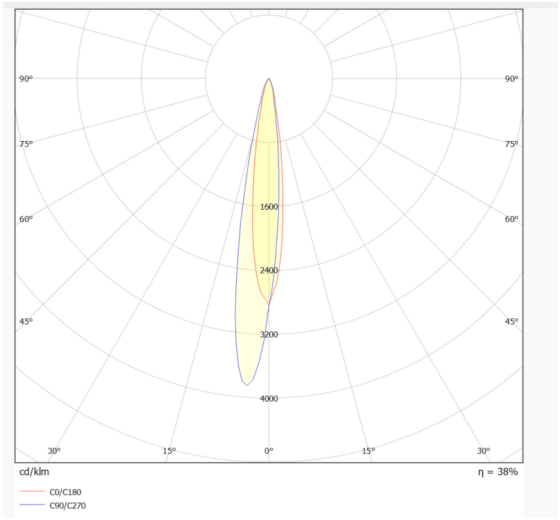
90°
75°
60°
45°
1600
2400
3200
4000
30°
15°
0°
cd/klm
η = 38%
C0/C180
C90/C270

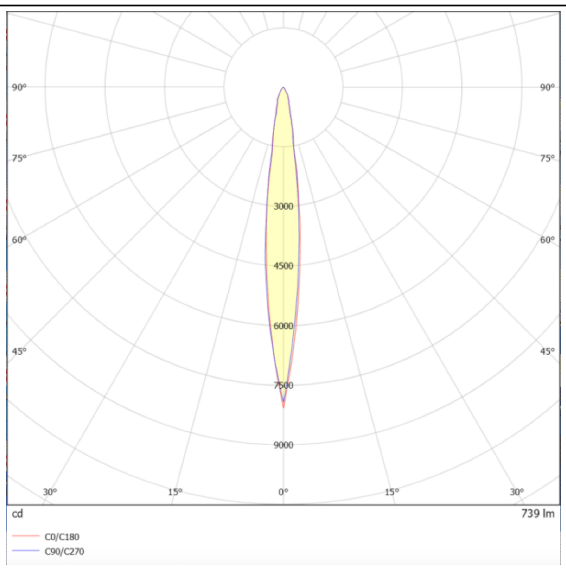
90°
75°
60°
45°
3000
4500
6000
7500
9000
30°
15°
0°
cd
739 lm
C0/C180
C90/C270