




---

---

#### Scheme

---

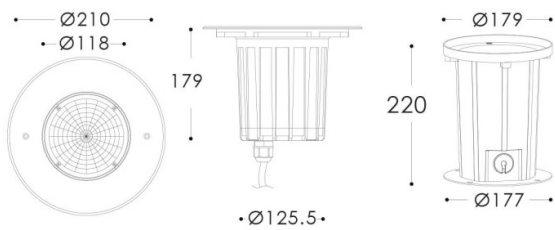


---

---

#### Photometry

---

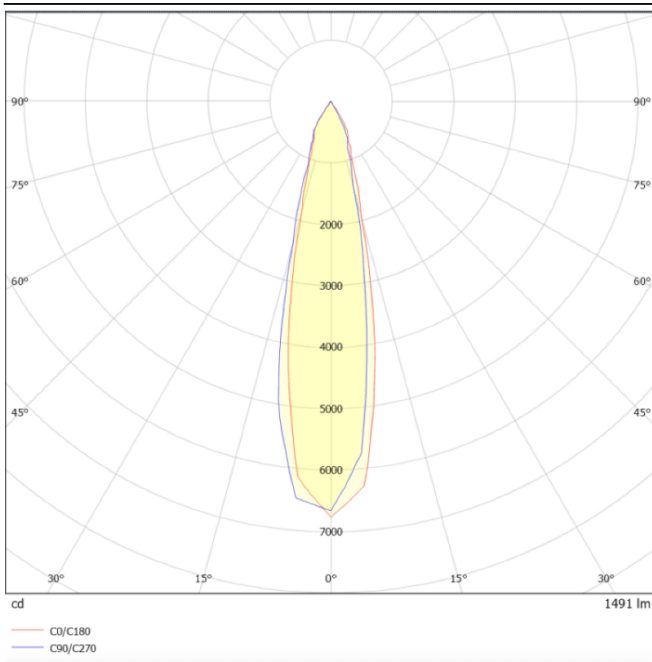

### ING-XL

Recessed Inground Floor from the family ING-XL with a power of 18,5W and a beam angle of 22 degrees. with a real lumen output of 1530 lm, and an efficiency of 82,7 lm/W, made in Die Cast Aluminium Body, Front Ring Stainless Steel. , Tempered Glass Cover and finished in Stainless Steel. ON-OFF driver.

Item code	86.OIN5.1321.07
Product type	Outdoor
Category	Recessed Inground Floor
Family	ING
Subfamily	ING-XL
Pictograms	<div> <div> </div> <div> 50 60 Hz </div> <div> 220 240 V </div> <div> </div> <div> IK 10 </div> </div> <div> <div> CRI 80 </div> <div> SDCM 3 </div> <div> CE </div> <div> Driver INCL </div> <div> </div> </div> <div> <div> IP 66 </div> <div> 50000h L80B10 </div> </div>

Product	
Real power (W)	18.5
Real luminous flux (Lm)	1530
Luminous efficiency (Lm/W)	82.7
Beam angle (°)	22
Life time (h)	50000h L80B10
IP	66
Electrical class insulation	Class I
Colour	Stainless steel
Control gear included	Yes
Control gear	ON-OFF
Light source	1x18W Nichia COB
Colour temperature (K)	3000
Colour consistency (SDCM)	SDCM<3
CRI	80
IK	10