





Scheme

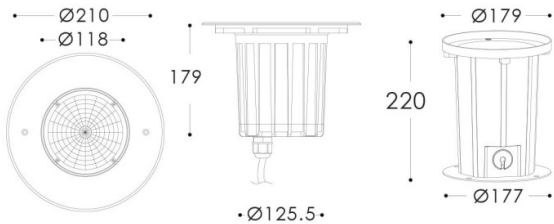

Photometry

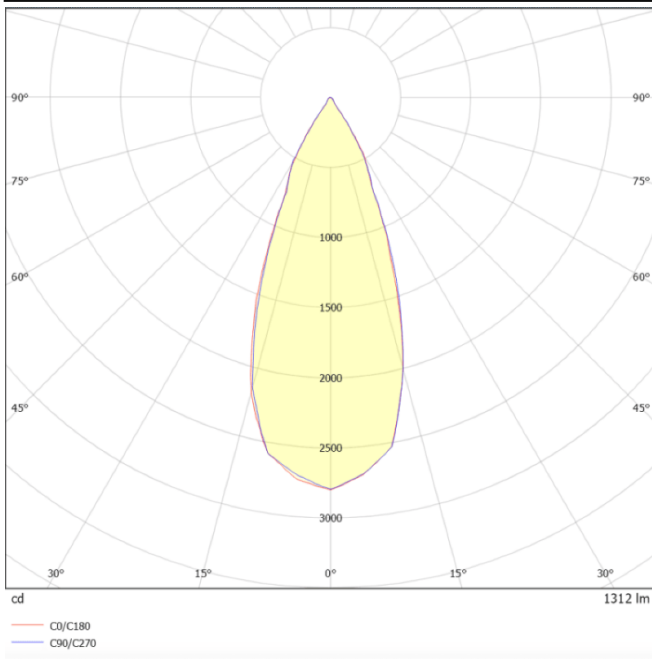

### ING-XL

Recessed Inground Floor from the family ING-XL with a power of 18,5W and a beam angle of 38 degrees. with a real lumen output of 1530 lm, and an efficiency of 82,7 lm/W, made in Die Cast Aluminium Body, Front Ring Stainless Steel. , Tempered Glass Cover and finished in Stainless Steel. ON-OFF driver.

|              |  |
|--------------|--|
| Item code    | 86.OIN5.1331.07  |
| Product type | Outdoor  |
| Category     | Recessed Inground Floor  |
| Family       | ING  |
| Subfamily    | ING-XL   |
| Pictograms   | <div> <div> </div> <div> 50<br/>60 Hz </div> <div> 220<br/>240 V </div> <div> </div> <div> IK<br/>10 </div> </div> <div> <div> CRI<br/>80 </div> <div> SDCM<br/>3 </div> <div> CE </div> <div> Driver<br/>INCL </div> <div> </div> </div> <div> <div> IP<br/>66 </div> <div> 50000h<br/>L80B10 </div> </div> |

|                             |                  |
|-----------------------------|------------------|
| Product                     |                  |
| Real power (W)              | 18.5             |
| Real luminous flux (Lm)     | 1530             |
| Luminous efficiency (Lm/W)  | 82.7             |
| Beam angle (°)              | 38               |
| Life time (h)               | 50000h L80B10    |
| IP                          | 66               |
| Electrical class insulation | Class I          |
| Colour                      | Stainless steel  |
| Control gear included       | Yes              |
| Control gear                | ON-OFF           |
| Light source                | 1x18W Nichia COB |
| Colour temperature (K)      | 3000             |
| Colour consistency (SDCM)   | SDCM<3           |
| CRI                         | 80               |
| IK                          | 10               |