





**ING-XL**

Recessed Inground Floor from the family ING-XL with a power of 20W and a beam angle of 22 degrees. with a real lumen output of 1530 lm, and an efficiency of 82,7 lm/W, made in Die Cast Aluminium Body, Front Ring Stainless Steel, Tempered Glass Cover and finished in Stainless Steel. ON-OFF driver.

**Scheme**

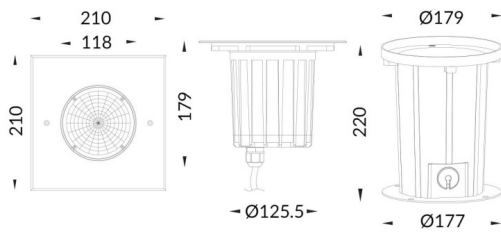

**Photometry**

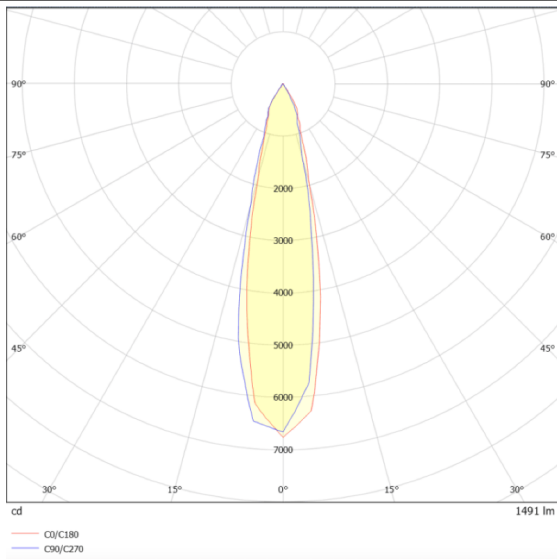

<b>Item code</b>	<b>86.OIN5.2321.07</b>
<b>Product type</b>	<b>Outdoor</b>
<b>Category</b>	<b>Recessed Inground Floor</b>
<b>Family</b>	<b>ING</b>
<b>Subfamily</b>	<b>ING-XL</b>

**Pictograms**

- 50/60 Hz, 220/240 V, 850° IK 10
- CRI 80, SDCM 3, CE, Driver INCL.
- IP 66, 50000h L80B10

<b>Product</b>	
<b>Real power (W)</b>	<b>20</b>
<b>Real luminous flux (Lm)</b>	<b>1530</b>
<b>Luminous efficiency (Lm/W)</b>	<b>82.7</b>
<b>Beam angle (&amp;ordm;)</b>	<b>22</b>
<b>Life time (h)</b>	<b>50000h L80B10</b>
<b>IP</b>	<b>66</b>
<b>Electrical class insulation</b>	<b>Class I</b>
<b>Colour</b>	<b>Stainless steel</b>
<b>Control gear included</b>	<b>Yes</b>
<b>Control gear</b>	<b>ON-OFF</b>
<b>Light source</b>	<b>1x18W Nichia COB</b>
<b>Colour temperature (K)</b>	<b>3000</b>
<b>Colour consistency (SDCM)</b>	<b>SDCM&lt;3</b>
<b>CRI</b>	<b>80</b>
<b>IK</b>	<b>10</b>