



Scheme

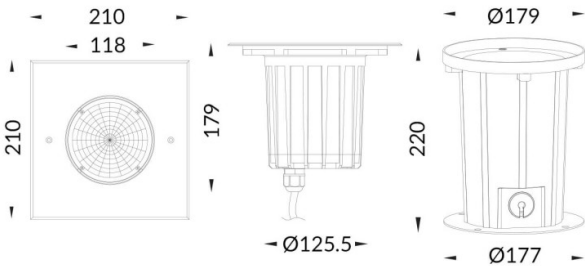

Photometry

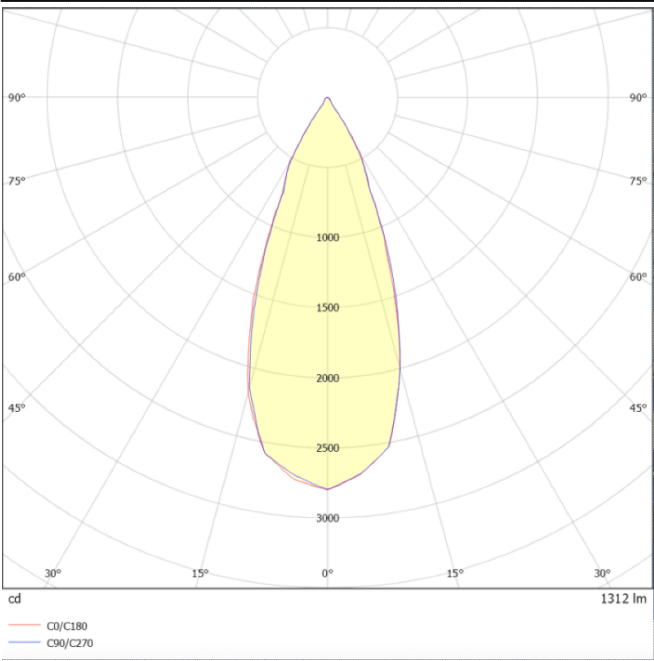

ING-XL

Recessed Inground Floor from the family ING-XL with a power of 18,5W and a beam angle of 38 degrees. with a real lumen output of 1530 lm, and an efficiency of 82,7 lm/W, made in Die Cast Aluminium Body, Front Ring Stainless Steel. , Tempered Glass Cover and finished in Stainless Steel. ON-OFF driver.

|              |   |
|--------------|---|
| Item code    | 86.OIN5.2331.07   |
| Product type | Outdoor   |
| Category     | Recessed Inground Floor   |
| Family       | ING   |
| Subfamily    | ING-XL  |
| Pictograms   | <div><div></div><div>50<br/>60 Hz</div><div>220<br/>240 V</div><div></div><div>IK<br/>10</div></div> <div><div>CRI<br/>80</div><div>SDCM<br/>3</div><div>CE</div><div>Driver<br/>INCL.</div><div></div></div> <div><div>IP<br/>66</div><div>50000h<br/>L80B10</div></div> |

|                             |                  |
|-----------------------------|------------------|
| Product                     |                  |
| Real power (W)              | 18.5             |
| Real luminous flux (Lm)     | 1530             |
| Luminous efficiency (Lm/W)  | 82.7             |
| Beam angle (°)              | 38               |
| Life time (h)               | 50000h L80B10    |
| IP                          | 66               |
| Electrical class insulation | Class I          |
| Colour                      | Stainless steel  |
| Control gear included       | Yes              |
| Control gear                | ON-OFF           |
| Light source                | 1x18W Nichia COB |
| Colour temperature (K)      | 3000             |
| Colour consistency (SDCM)   | SDCM<3           |
| CRI                         | 80               |
| IK                          | 10               |