





ING-XL

Recessed Inground Floor from the family ING-XL with a power of 20W and a beam angle of 40 degrees. with a real lumen output of 1530 lm, and an efficiency of 82,7 lm/W, made in Die Cast Aluminium Body, Front Ring Stainless Steel, Tempered Glass Cover and finished in Stainless Steel. ON-OFF driver.

Scheme

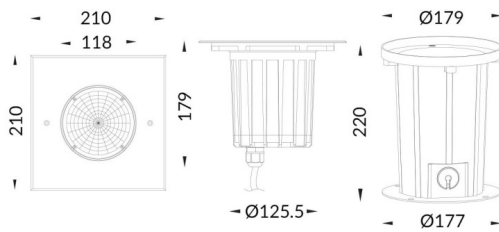

Photometry

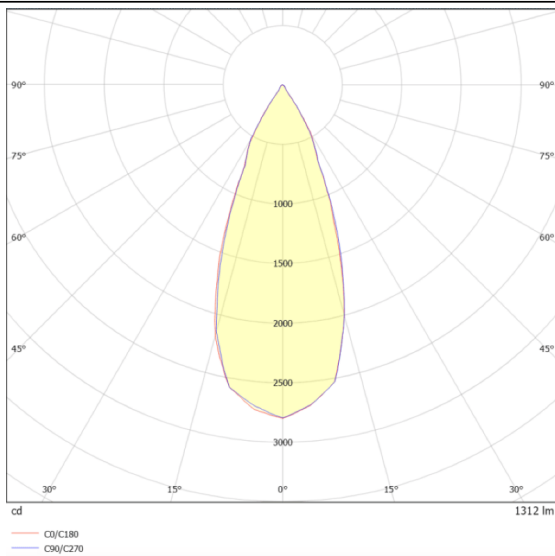

Item code	86.OIN5.2331.07
Product type	Outdoor
Category	Recessed Inground Floor
Family	ING
Subfamily	ING-XL

Pictograms

- 50/60 Hz, 220/240 V, 850° IK 10
- CRI 80, SDCM 3, CE, Driver INCL.
- IP 66, 50000h L80B10

Product	
Real power (W)	20
Real luminous flux (Lm)	1530
Luminous efficiency (Lm/W)	82.7
Beam angle (&ordm;)	40
Life time (h)	50000h L80B10
IP	66
Electrical class insulation	Class I
Colour	Stainless steel
Control gear included	Yes
Control gear	ON-OFF
Light source	1x18W Nichia COB
Colour temperature (K)	3000
Colour consistency (SDCM)	SDCM<3
CRI	80
IK	10