





Scheme

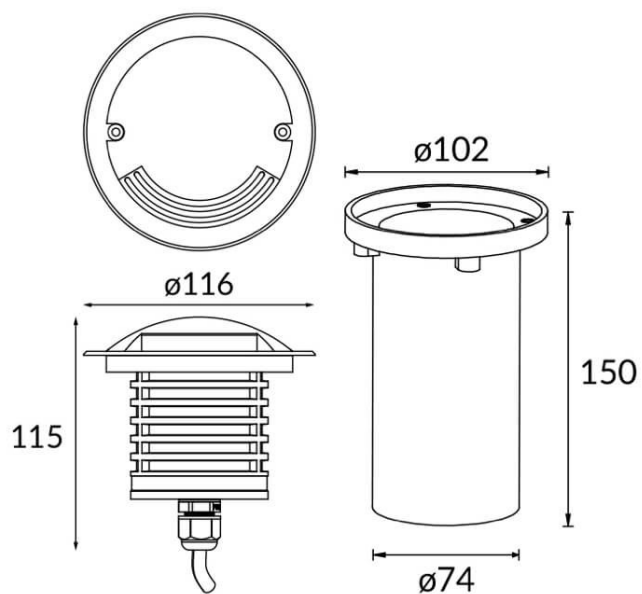

Photometry

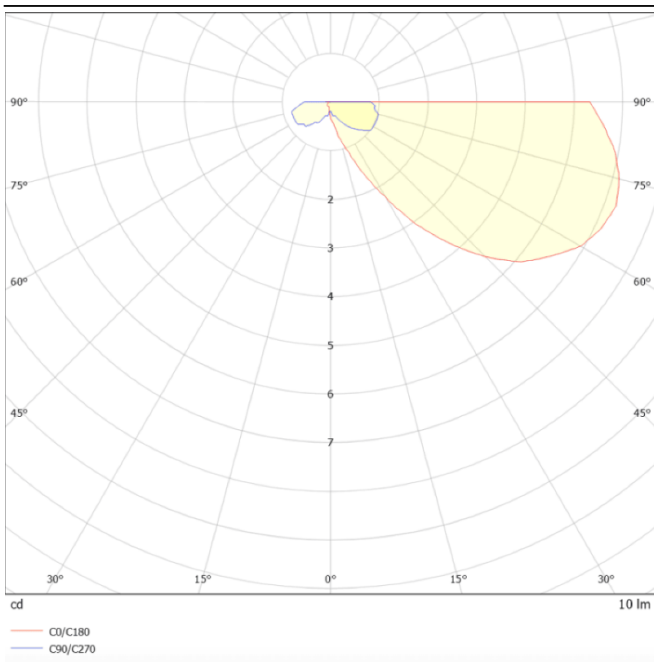

MARK-L

Recessed Inground Floor from the family MARK-L with a power of 4W and an assymetric distribution one emmiting window , made in Die Cast Aluminium Body, and finished in Grey. ON-OFF driver.

Item code	86.OIN6.1331.03
Product type	Outdoor
Category	Recessed Inground Floor
Family	MARK
Subfamily	MARK-L
Pictograms	<div> <div> <div> <div> <div></div> <div>50 Hz</div> <div>220 240 V</div> </div> <div> <div></div> <div>IK 10</div> </div> </div> <div> <div> <div>CRI 80</div> <div>SDCM 3</div> </div> <div> <div>CE</div> <div>Driver INCL</div> </div> </div> <div> <div> <div></div> <div>50000h L80B10</div> </div> <div> <div></div> <div>IP 67</div> </div> </div> </div> </div>

Product	
Real power (W)	4
Beam angle (°)	assymetric
Life time (h)	50000h L80B10
IP	67
Electrical class insulation	Class I
Colour	Grey
Control gear included	Yes
Control gear	ON-OFF
Light source	6x0.5W SMD
Colour temperature (K)	3000
Colour consistency (SDCM)	SDCM<3
CRI	80
IK	10