





Scheme



Photometry

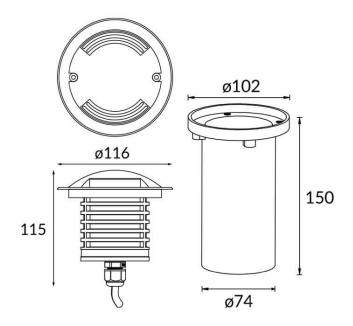

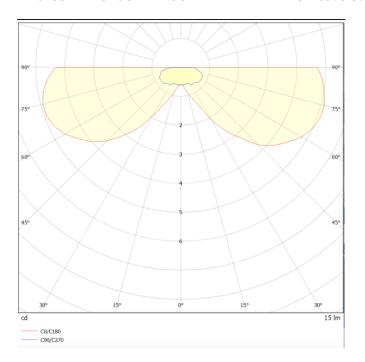

MARK-L

Recessed Inground Floor from the family MARK-L with a power of $4\mbox{W}$ and an assymetric distribution two emmiting window , made in Die Cast Aluminium Body, and finished in Grey. ON-OFF driver.

Item code	86.0IN6.2331.03 Outdoor Recessed Inground Floor	
Product type		
Category		
Family	MARK	
Subfamily	MARK-L	
Pictograms	50 Hz 220 V S50° IK 10	
	CRI SDCM 3 CE Driver INCL.	
	50000h IP L80B10 67	

Product	
Real power (W)	4
Beam angle (º)	assymetric
Life time (h)	50000h L80B10
IP	67
Electrical class insulation	Class I
Colour	Grey
Control gear included	Yes
Control gear	ON-OFF
Light source	6x0.5W SMD
Colour temperature (K)	3000
Colour consistency (SDCM)	SDCM<3
CRI	80
IK	10

