




---

---

#### Scheme


---

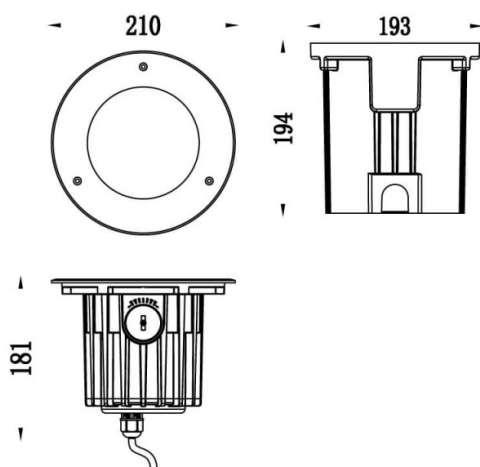

---





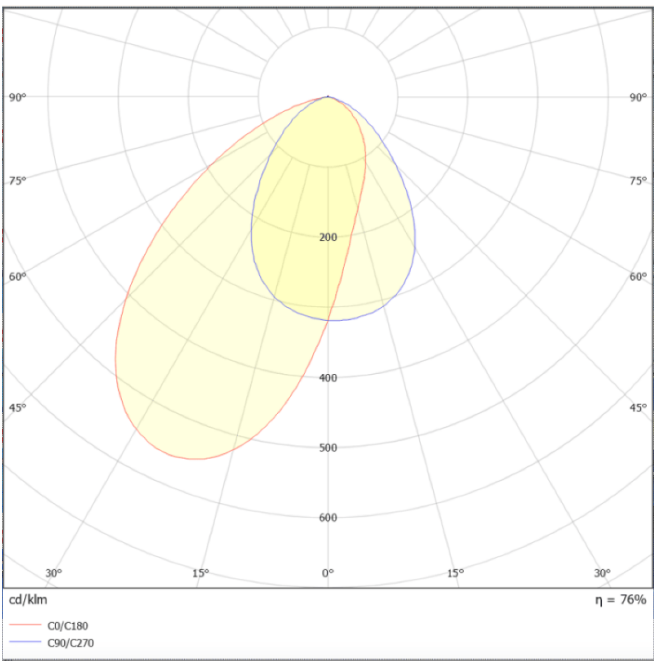





---

#### Photometry



ING-ASSY

Recessed Inground Floor from the family ING-ASSY with a power of 24W and an assymetric beam angle of 27 degrees. with a real lumen output of 1767 lm, and an efficiency of 76% lm/W, made in Die Cast Aluminium Body, Front Ring stainless Steel, Tempered Glass Cover and finished in Stainless steel.On-Off driver.

|              |   |
|--------------|---|
| Item code    | 86.OIN6.5351.07   |
| Product type | Outdoor   |
| Category     | Recessed Inground Floor   |
| Family       | ING-ASSY  |
| Pictograms   | <div><div>50<br/>60 Hz</div><div>220<br/>240 V</div><div>850°</div><div>IK<br/>09</div><div>CRI<br/>80</div><div>CE</div><div>Driver<br/>INCL.</div><div>SDCM<br/>5</div><div>50000h<br/>L80B10</div><div>IP<br/>67</div></div> |

|                             |                |
|-----------------------------|----------------|
| Product                     |                |
| Real power (W)              | 24W            |
| Real luminous flux (Lm)     | 1767           |
| Beam angle (°)              | Asymmetric 27° |
| Life time (h)               | 50000h L80B10  |
| IP                          | IP67           |
| Electrical class insulation | Class I        |
| Colour                      | Natural        |
| Control gear included       | yes            |
| Control gear                | On-Off         |
| Power Factor                | On-Off         |
| Flicker Free                | Yes            |
| Light source                | LED            |
| Type of LED                 | CREE COB       |
| Colour temperature (K)      | 3000K          |
| Colour consistency (SDCM)   | <5SDCM         |
| CRI                         | 80             |
| IK                          | 09             |