





Scheme



Photometry

RECESSED INGROUND FLOOR - MARK



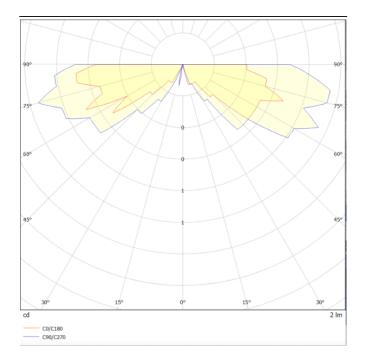

MARK-S

Recessed Inground Floor from the family MARK-S with a power of 3W and an assymetric distribution two emmiting window , made in Die Cast Aluminium Body, and finished in Grey. ON-OFF driver.

ltem code	86.0IN7.2331.03 Outdoor Recessed Inground Floor MARK	
Product type		
Category		
Family		
Subfamily	MARK-S	
Pictograms	50 Hz 220 V 60 Hz 240 V 850° 10	
	CRI SDCM 80 3 CE Driver INCL	
	50000h IP L80B10 67	

Product	
Real power (W)	3
Beam angle (º)	assymetric
Life time (h)	50000h L80B10
IP	67
Electrical class insulation	Class I
Colour	Grey
Control gear included	Yes
Control gear	ON-OFF
Light source	1x2W Osram
Colour temperature (K)	3000
Colour consistency (SDCM)	SDCM<3
CRI	80
IK	10

