




Dimensions

Product dimensions (mm) 55x80x500mm

Scheme

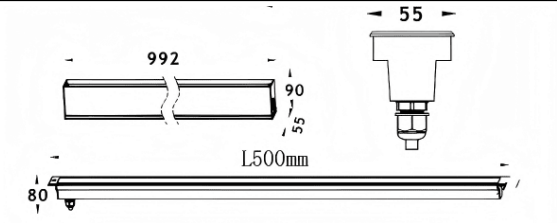

LINEAR

Lavov recessed inground floor from the family LINEAR, with a power of 24W and a 60 degrees beam angle. Finished in Stainless steel colour. Dimensions 55x80x500mm. With a total lumen output of 1390lm and a luminous efficiency of 58lm/W. CCT 3000K. Driver ON-OFF. Made in Die Cast Aluminium Body, Front Ring stainless Steel, Tempered Glass Cover. IP67. IK07

| | | | | | | |
|--------------|-------------------------|-------------|-----------------|----------|------------------|--|
| Item code | 86.OIN8.1341.03 | | | | | |
| Product type | Outdoor | | | | | |
| Category | Recessed Inground Floor | | | | | |
| Family | LINEAR | | | | | |
| Pictograms | | 50 60 Hz | 220 240 V | 850° | CRI 80 | |
| | SDCM 3 | CE | Driver INCL. | | 50000h L80B10 | |
| | IK 07 | | IP 67 | | | |

| | |
|-----------------------------|-----------------|
| Product | |
| Real power (W) | 24 |
| Real luminous flux (Lm) | 1390 |
| Luminous efficiency (Lm/W) | 58 |
| Beam angle (°) | 45 |
| Life time (h) | 50000h L80B10 |
| IP | 67 |
| Electrical class insulation | Class I |
| Colour | Stainless steel |
| Control gear included | Yes |
| Control gear | ON-OFF |
| Light source | 12x2,0W Osram |
| Colour temperature (K) | 3000 |
| Colour consistency (SDCM) | SDCM<3 |
| CRI | 80 |
| IK | IK07 |