





Scheme

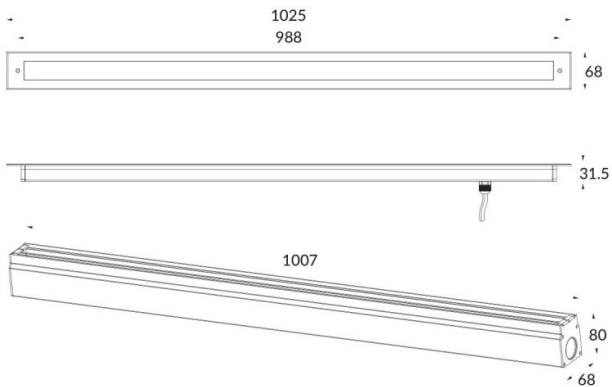

Photometry

RECESSED INGROUND FLOOR -
LINEAR

Item code 86.OIN8.2311.03

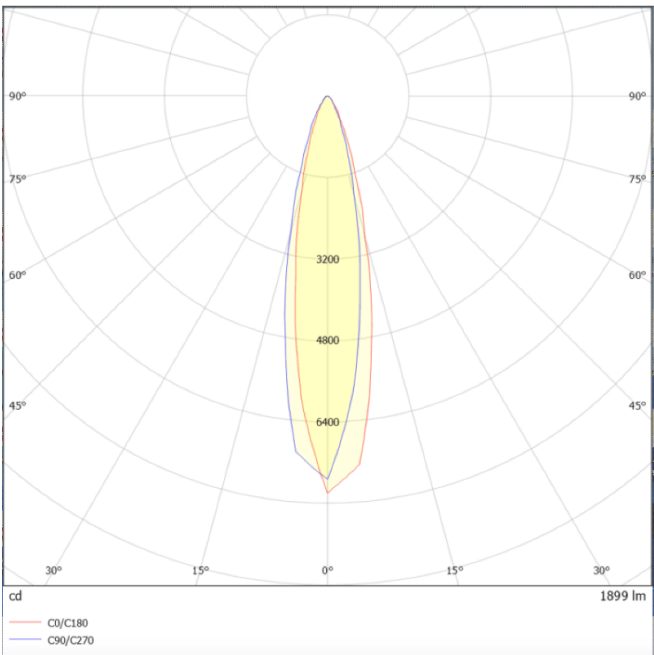

LINEAR-SYM

Recessed Inground Floor from the family LINEAR-SYM with a power of 36,4W and a beam angle of 20 degrees. with a real lumen output of 2055 lm, and an efficiency of 56,46 lm/W, made in Extruded Aluminium Body, Die Cast Aluminium End Caps, Tempered Glass Cover and finished in Grey. ON-OFF driver.

Item code	86.OIN8.2311.03
Product type	Outdoor
Category	Recessed Inground Floor
Family	LINEAR
Subfamily	LINEAR-SYM
Pictograms	

Product	
Real power (W)	36.4
Real luminous flux (Lm)	2055
Luminous efficiency (Lm/W)	56.46
Beam angle (°)	20
Life time (h)	50000h L80B10
IP	67
Electrical class insulation	Class I
Colour	Grey
Control gear included	Yes
Control gear	ON-OFF
Light source	12x1.5W Osram
Colour temperature (K)	3000
Colour consistency (SDCM)	SDCM<3
CRI	80
IK	07