
RECESSED INGROUND FLOOR -LINEAR

Item code 86.0IN8.2331.03






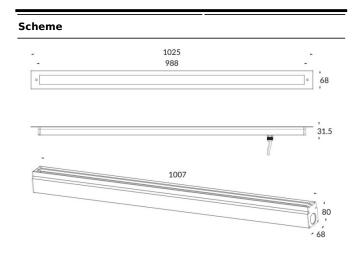

Photometry

RECESSED INGROUND FLOOR -LINEAR





LINEAR-SYM

Recessed Inground Floor from the family LINEAR-SYM with a power of 36,4W and a beam angle of 40 degrees. with a real lumen output of 2055 lm, and an efficiency of 56,46 lm/W, made in Extruded Aluminium Body, Die Cast Aluminium End Caps, Tempered Glass Cover and finished in Grey. ON-OFF driver.

ltem code	86.0IN8.2331.03					
Product type	Outdoor Recessed Inground Floor LINEAR					
Category						
Family						
Subfamily	LINEAR-SYM					
Pictograms		50 60 Hz	220 240 V	≻ 850°	CRI 80	
	SDCM 3	CE	Driver INCL.		50000h L80 B 10	
	IK 07	IP 67				

Product			
Real power (W)	36.4		
Real luminous flux (Lm)	2055		
Luminous efficiency (Lm/W)	56.46		
Beam angle (º)	40		
Life time (h)	50000h L80B10		
IP	67		
Electrical class insulation	Class I		
Colour	Grey		
Control gear included	Yes		
Control gear	ON-OFF		
Light source	12x1.5W Osram		
Colour temperature (K)	3000		
Colour consistency (SDCM)	SDCM<3		
CRI	80		
IK	07		

