


## LINEAR

Lavov recessed inground floor from the family LINEAR, with a power of 48W and a 10*45 degrees beam angle. Finished in Stainless steel colour.Dimensions 55x80x1000mm. With a total lumen output of 2780lm and a luminous efficiency of 58lm/W. CCT 3000K. Driver ON-OFF. Made in Die Cast Aluminium Body, Front Ring stainless Steel, Tempered Glass Cover. IP67. IK10

| | |
|---|---|
| **Item code** | **86.OIN8.2361.03** |
| **Product type** | **Outdoor** |
| **Category** | **Recessed Inground Floor** |
| **Family** | **LINEAR** |
| **Pictograms** |  |

| **Dimensions** | |
|---|---|
| **Product dimensions (mm)** | **55x80x1000mm** |

**Scheme**

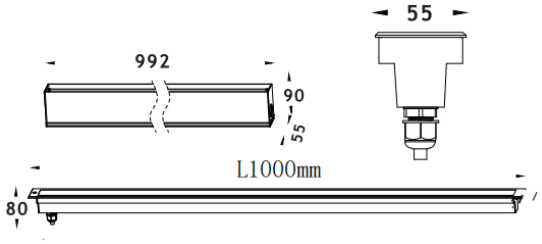


| **Product** | |
|---|---|
| **Real power (W)** | **48** |
| **Real luminous flux (Lm)** | **2780** |
| **Luminous efficiency (Lm/W)** | **58** |
| **Beam angle (º)** | **10*30** |
| **Life time (h)** | **50000h L80B10** |
| **IP** | **67** |
| **Electrical class insulation** | **Class I** |
| **Colour** | **Stainless steel** |
| **Control gear included** | **Yes** |
| **Control gear** | **ON-OFF** |
| **Light source** | **24x2.0W Osram** |
| **Colour temperature (K)** | **3000** |
| **Colour consistency (SDCM)** | **SDCM3** |
| **CRI** | **80** |
| **IK** | **IK10** |