





Scheme

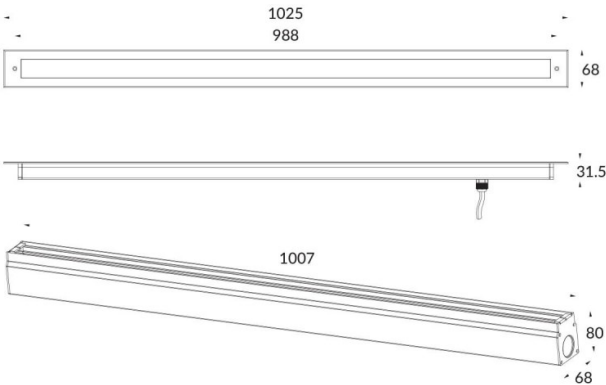

Photometry

RECESSED INGROUND FLOOR -
LINEAR

Item code 86.OIN8.2381.03

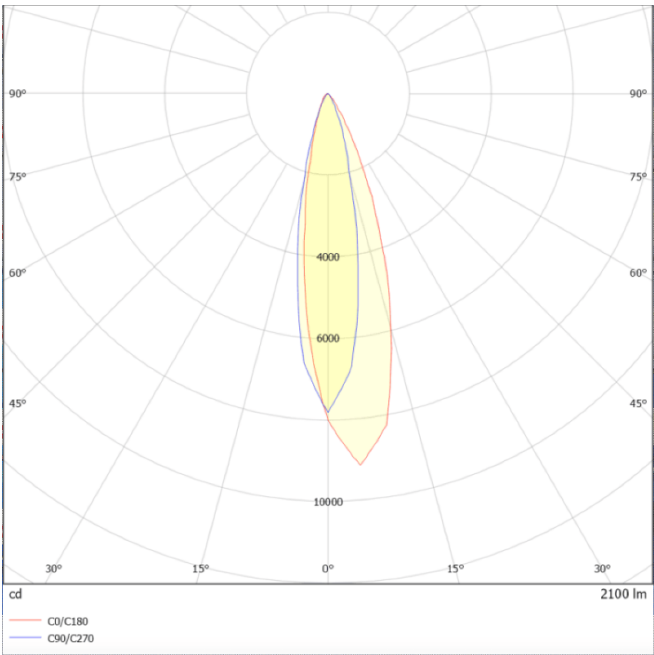

LINEAR-ASSYM

Recessed Inground Floor from the family LINEAR-ASSYM with a power of 36,4W and a beam angle of 45/35° Asymmetrical with a real lumen output of 2114 lm, and an efficiency of 58,08 lm/W, made in Extruded Aluminium Body, Die Cast Aluminium End Caps, Tempered Glass Cover and finished in Grey. ON-OFF driver.

Item code	86.OIN8.2381.03
Product type	Outdoor
Category	Recessed Inground Floor
Family	LINEAR
Subfamily	LINEAR-ASSYM
Pictograms	

Product	
Real power (W)	36.4
Real luminous flux (Lm)	2114
Luminous efficiency (Lm/W)	58.08
Beam angle (°)	45/35° Asymmetrical
Life time (h)	50000h L80B10
IP	67
Electrical class insulation	Class I
Colour	Grey
Control gear included	Yes
Control gear	ON-OFF
Light source	24x1.5W Osram
Colour temperature (K)	3000
Colour consistency (SDCM)	SDCM<3
CRI	80
IK	07