





## **Scheme**



Photometry



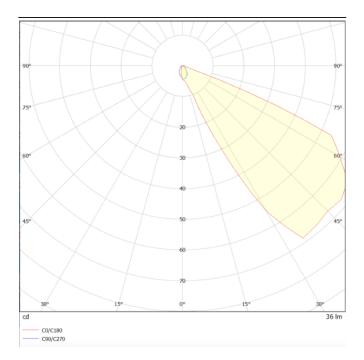

## STEP

Recessed Wall & Ceiling fixture from the family STEP with a power of 1.7W and an assymetric lighting distribution. Real lumen output 46lm and a luminous efficiency of 27lm/W . Made in Molded Stainless Steel Body and finished in natural stainless Steel .IP65, IK10 degree of protection.ON-OFF driver.

Item code	86.ORW2.2351.07  Outdoor  Recessed Wall & Ceiling	
Product type		
Category		
Family	STEP	
Pictograms	50 Hz 220 V	
	CRI SDCM C E Driver INCL.	
	50000h IP L70B10 65	

Product	
Real power (W)	1.7
Real luminous flux (Lm)	46
Luminous efficiency (Lm/W)	27
Beam angle (º)	Assymetric 45
Life time (h)	50000h L70B10
IP	65
Electrical class insulation	Class I
Colour	natural stainless Steel
Chip Brand	OSRAM
Control gear included	Yes
Control gear	ON-OFF
Flicker Free	Yes
Light source	1W OSRAM
Colour temperature (K)	3000
Colour consistency (SDCM)	SDCM<3
CRI	80
IK	IK10