





Scheme

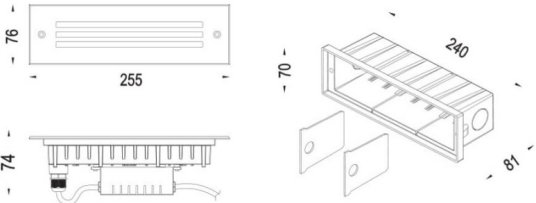

Photometry

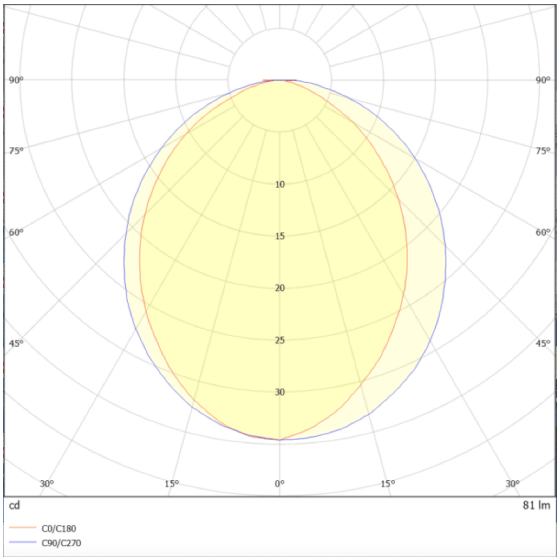

WALLR

Lavov recessed fixture from the family WALLR with a power of 6.5W and a 120 beam angle. Finished in natural stainless Steel colour. Dimensions .. With a total lumen output of 130lm and a luminous efficiency of 20lm/W. CCT 3000K. Driver ON-OFF. Made in Die Cast Aluminium Body, Front Ring Stainless Steel, Tempered Glass Cover. .IP65. IK10

Item code	86.ORW9.1301.07
Product type	Outdoor
Category	Recessed Wall & Ceiling
Family	WALLR
Pictograms	<div><div></div><div>50 60 Hz</div><div>220 240 V</div><div></div><div>850°</div><div>CRI 80</div></div> <div><div>SDCM 3</div><div>CE</div><div>Driver INCL.</div><div></div><div>50000h L70B10</div></div> <div><div>IP 65</div><div>IK 09/10</div></div>

Product	
Real power (W)	6.5
Real luminous flux (Lm)	130
Luminous efficiency (Lm/W)	20
Beam angle (°)	120
Life time (h)	50000h L70B10
IP	IP65
Electrical class insulation	Class I
Colour	natural stainless Steel
Control gear included	Yes
Control gear	ON-OFF
Flicker Free	Yes
Light source	LED
Type of LED	SMD
Colour temperature (K)	3000
Colour consistency (SDCM)	SDCM<3
CRI	80
IK	IK10