






Scheme

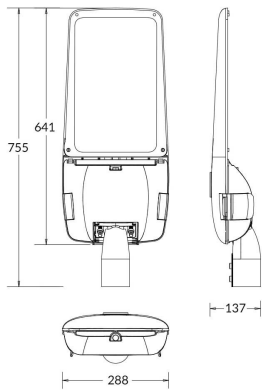

Photometry



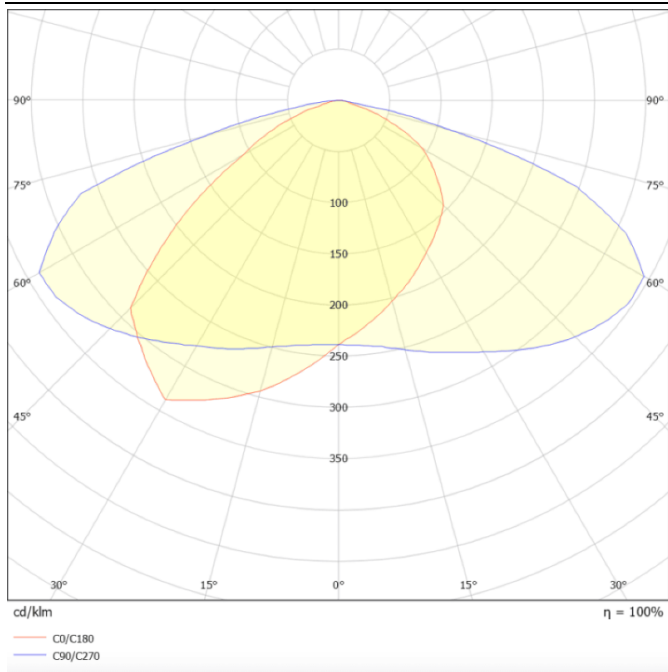

VIALIGHT

Street Light from the family VIALIGHT with a power of 200W and a lighting distribution type T2/T3 with a real lumen output of 26000lm, and an efficiency of 130lm/W, CRI ≥ 70 with a ON-OFF driver, made in Die Cast Aluminium Body, Front Tempered Glass and finished in Grey color

Item code	86.OS01.A471.03
Product type	Outdoor
Category	Street lights
Family	VIALIGHT
Pictograms	

Product	
Real power (W)	200
Real luminous flux (Lm)	26000
Luminous efficiency (Lm/W)	130
Beam angle (°)	T2/T3
Life time (h)	50000h L70B10
IP	66
Electrical class insulation	Class I
Colour	Grey
Control gear included	Yes
Control gear	ON-OFF
Type of LED	LUMILEDS 3030
Average life time (h)	Up to 100,000hrs LM70, Ta 25°C
Colour temperature (K)	3000K
Colour consistency (SDCM)	<4
CRI	>70
IK	IK10