





Scheme

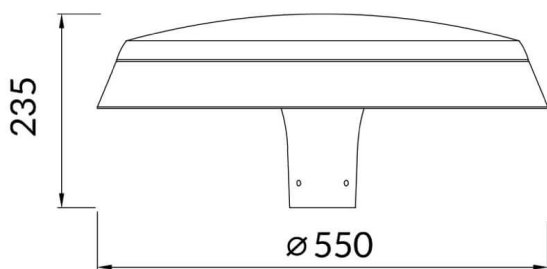

Photometry

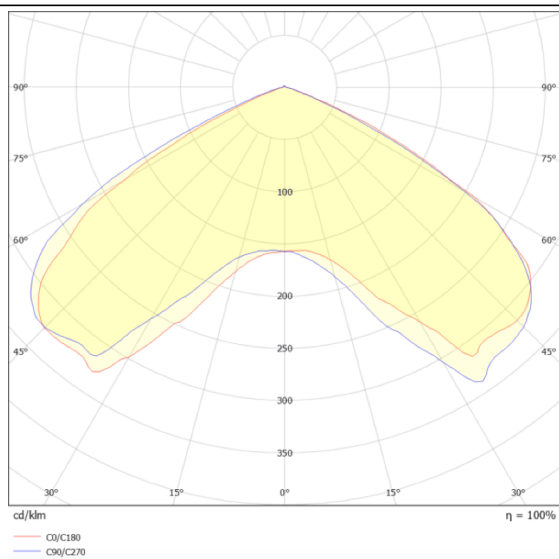

FLAT

Lavov Street light from the family FLAT with a power of 40W and an optics T1/T90 degrees . CCT 4000K. With a total lumen output of 5200lm and a luminous efficiency of 135lm/W.DALI driver.

Made in die cast aluminum and finished in Grey color. IP66 and IK K09 degree of protection.

| | | | | | |
|--------------|-----------------|--|--|--|--|
| Item code | 86.OS02.1473.03 | | | | |
| Product type | Outdoor | | | | |
| Category | Street lights | | | | |
| Family | FLAT | | | | |
| Pictograms | | | | | |

| | |
|-----------------------------|-----------------------|
| Product | |
| Real power (W) | 40 |
| Real luminous flux (Lm) | 5200 |
| Luminous efficiency (Lm/W) | 135 |
| Beam angle (°) | T1/T90 |
| Life time (h) | 50000h L70B10 |
| IP | 66 |
| Electrical class insulation | Class I |
| Colour | Grey |
| Control gear included | Yes |
| Control gear | DALI |
| Light source | LED |
| Type of LED | PHILIPS 5050 With SPD |
| Colour temperature (K) | 4000 |
| Colour consistency (SDCM) | SDCM<5 |
| CRI | ≥70 |
| IK | IK09 |