**SPIKE SPOT LIGHT - SPYKE** **Item code 86.OS06.2341.02**




## Spyke Base

Lavov outdoor spotlight from the family Spyke Base with a power of 20W and a beam angle of 24º. Installation with base. Finished in Black colour. Dimensions ø100x160mm,H231mm.With a total lumen output of 2200 lm and a luminous efficiency of 110lm/W.Manufactured in Die Cast Aluminum Body and base , Cover Tempered Glass. CRI>BP2. CCT 3000K. IP66. AC 220-240V (internal driver).

| | |
|---|---|
| **Item code** | **86.OS06.2341.02** |
| **Product type** | **Outdoor** |
| **Category** | **Spike Spot Light** |
| **Family** | **SPYKE** |
| **Subfamily** | **Spyke Base** |
| **Pictograms** | |


| **Dimensions** | |
|---|---|
| **Product dimensions (mm)** | **ø100x160mm,H231mm** |

**Scheme**

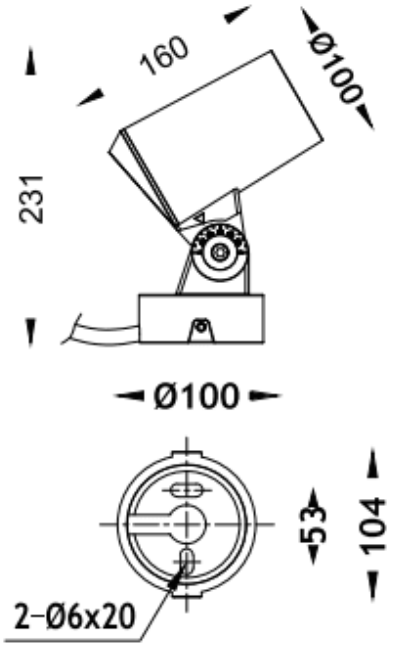


| **Product** | |
|---|---|
| **Real power (W)** | **20** |
| **Real luminous flux (Lm)** | **2200** |
| **Luminous efficiency (Lm/W)** | **110** |
| **Beam angle (º)** | **24º** |
| **Life time (h)** | **50000h L70B10** |
| **IP** | **66** |
| **Electrical class insulation** | **Class II** |
| **Electrical feeding** | **220/240V** |
| **Colour** | **Black** |
| **Chip Brand** | **CREE** |
| **Control gear included** | **Yes** |
| **Control gear** | **ON-OFF** |
| **Light source** | **LED** |
| **Type of LED** | **1x20CREE COB** |
| **Average life time (h)** | **50000h L70B10** |
| **Colour temperature (K)** | **3000** |
| **Colour consistency (SDCM)** | **SDCM3** |
| **CRI** | **80** |
| **IK** | **IK05** |

## Photometry

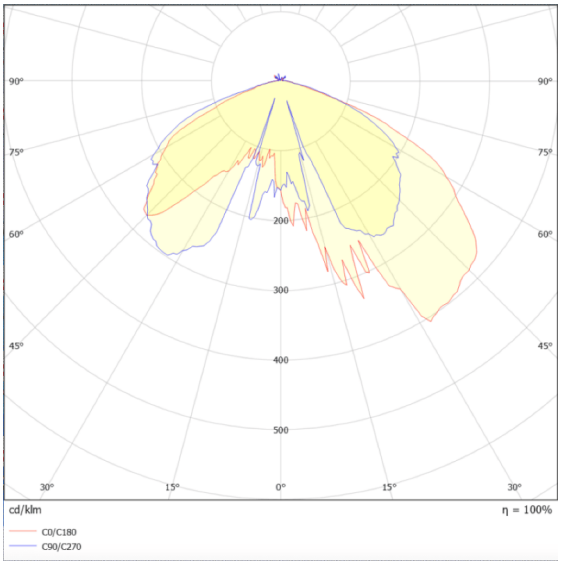
90°
90°
75°
75°
60°
60°
200
300
45°
45°
400
500
30°
15°
0°
15°
30°
cd/klm
η = 100%
C0/C180
C90/C270