



Vialight II

Lavov Street light from the family VIALIGHT with a power of 40W and an optics T2 (150°X75°) degrees . CCT 4000K. With a total lumen output of 6400lm and a luminous efficiency of 160lm/W.DALI driver. Made in die cast aluminum and finished in Grey color. IP65 and IK IK08 degree of protection.

| | |
|------------------|------------------------|
| Item code | 86.OS11.2473.03 |
|------------------|------------------------|

| | |
|---------------------|----------------|
| Product type | Outdoor |
|---------------------|----------------|

| | |
|-----------------|----------------------|
| Category | Street lights |
|-----------------|----------------------|

| | |
|---------------|--------------------|
| Family | Vialight II |
|---------------|--------------------|


Pictograms



Dimensions

Product dimensions (mm) 220x515x85mm

Scheme

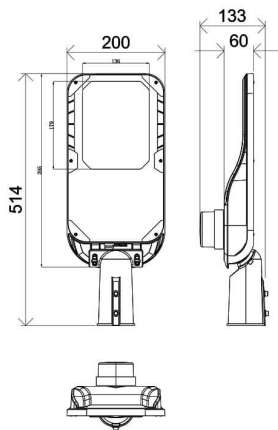

Product

| | |
|-----------------------|-----------|
| Real power (W) | 40 |
|-----------------------|-----------|

| | |
|--------------------------------|-------------|
| Real luminous flux (Lm) | 6400 |
|--------------------------------|-------------|

| | |
|-----------------------------------|------------|
| Luminous efficiency (Lm/W) | 160 |
|-----------------------------------|------------|

| | |
|-----------------------|----------------------|
| Beam angle (°) | T2 (150°X75°) |
|-----------------------|----------------------|

| | |
|----------------------|----------------------|
| Life time (h) | 50000h L70B10 |
|----------------------|----------------------|

| | |
|-----------|-----------|
| IP | 65 |
|-----------|-----------|

| | |
|------------------------------------|----------------|
| Electrical class insulation | Class I |
|------------------------------------|----------------|

| | |
|---------------|-------------|
| Colour | Grey |
|---------------|-------------|

| | |
|------------------------------|------------|
| Control gear included | Yes |
|------------------------------|------------|

| | |
|---------------------|-------------|
| Control gear | DALI |
|---------------------|-------------|

| | |
|---------------------|------------|
| Light source | LED |
|---------------------|------------|

| | |
|--------------------|------------------------|
| Type of LED | Sanan / SMD3030 |
|--------------------|------------------------|

| | |
|------------------------------|--------------------------------------|
| Average life time (h) | Up to 100,000hrs LM70,Ta 25°C |
|------------------------------|--------------------------------------|

| | |
|-------------------------------|-------------|
| Colour temperature (K) | 4000 |
|-------------------------------|-------------|

| | |
|----------------------------------|------------------|
| Colour consistency (SDCM) | SDCM<6 |
|----------------------------------|------------------|

| | |
|------------|------------|
| CRI | ≥70 |
|------------|------------|

| | |
|-----------|-------------|
| IK | IK08 |
|-----------|-------------|