




| Dimensions              |              |
|-------------------------|--------------|
| Product dimensions (mm) | 220x515x85mm |

Scheme



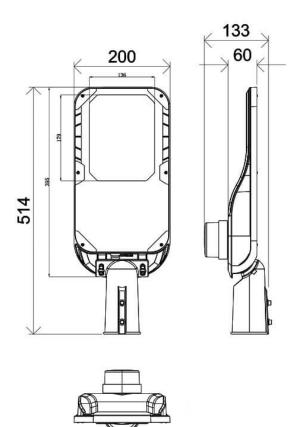

## Vialight II

Lavov Street light from the family Vialight II with a power of 50Wand an optics T2 (150 $^{\circ}$ X75 $^{\circ}$ ) degrees . CCT 4000K. With a total lumen output of 7500lm and a luminous efficiency of 150lm/W.DALI driver. Made in die cast aluminum and finished in Grey color. IP65 and IK IK08 degree of protection.

| Item code    | 86.OS11.3473.03           |  |  |
|--------------|---------------------------|--|--|
| Product type | Outdoor                   |  |  |
| Category     | Street lights             |  |  |
| Family       | Vialight II               |  |  |
| Pictograms   | 220 v >   C € Driver INCL |  |  |
|              | IP CRI 66 70              |  |  |
|              | SDCM 50000h 1K 170B10 08  |  |  |

| Product                       | -                                |
|-------------------------------|----------------------------------|
| Real power (W)                | 50                               |
| Real luminous flux (Lm)       | 7500                             |
| Luminous efficiency<br>(Lm/W) | 150                              |
| Beam angle (º)                | T2 (150ºX75º)                    |
| Life time (h)                 | 50000h L70B10                    |
| IP                            | 65                               |
| Electrical class insulation   | Class I                          |
| Colour                        | Grey                             |
| Control gear included         | Yes                              |
| Control gear                  | DALI                             |
| Light source                  | LED                              |
| Type of LED                   | Sanan / SMD3030                  |
| Average life time (h)         | Up to 100,000hrs LM70,Ta<br>25°C |
| Colour temperature (K)        | 4000                             |
| Colour consistency<br>(SDCM)  | SDCM<6                           |
| CRI                           | ≥70                              |
| IK                            | IK08                             |

