



Vialight II

Lavov Street light from the family VIALIGHT with a power of 180W and an optics T2 (150°X75°) degrees . CCT 4000K. With a total lumen output of 27000lm and a luminous efficiency of 150lm/W.ON-OFF driver. Made in die cast aluminum and finished in Grey color. IP65 and IK IK08 degree of protection.

| | |
|------------------|------------------------|
| Item code | 86.OS11.9471.03 |
|------------------|------------------------|

| | |
|---------------------|----------------|
| Product type | Outdoor |
|---------------------|----------------|

| | |
|-----------------|----------------------|
| Category | Street lights |
|-----------------|----------------------|

| | |
|---------------|--------------------|
| Family | Vialight II |
|---------------|--------------------|


Pictograms



Dimensions

Product dimensions (mm) 240x635x85mm

Scheme

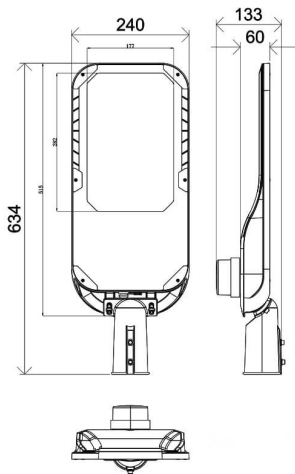

Product

| | |
|-----------------------|------------|
| Real power (W) | 180 |
|-----------------------|------------|

| | |
|--------------------------------|--------------|
| Real luminous flux (Lm) | 27000 |
|--------------------------------|--------------|

| | |
|-----------------------------------|------------|
| Luminous efficiency (Lm/W) | 150 |
|-----------------------------------|------------|

| | |
|-----------------------|----------------------|
| Beam angle (°) | T2 (150°X75°) |
|-----------------------|----------------------|

| | |
|----------------------|----------------------|
| Life time (h) | 50000h L70B10 |
|----------------------|----------------------|

| | |
|-----------|-----------|
| IP | 65 |
|-----------|-----------|

| | |
|------------------------------------|----------------|
| Electrical class insulation | Class I |
|------------------------------------|----------------|

| | |
|---------------|-------------|
| Colour | Grey |
|---------------|-------------|

| | |
|------------------------------|------------|
| Control gear included | Yes |
|------------------------------|------------|

| | |
|---------------------|---------------|
| Control gear | ON-OFF |
|---------------------|---------------|

| | |
|---------------------|------------|
| Light source | LED |
|---------------------|------------|

| | |
|--------------------|------------------------|
| Type of LED | Sanan / SMD3030 |
|--------------------|------------------------|

| | |
|------------------------------|--------------------------------------|
| Average life time (h) | Up to 100,000hrs LM70,Ta 25°C |
|------------------------------|--------------------------------------|

| | |
|-------------------------------|-------------|
| Colour temperature (K) | 4000 |
|-------------------------------|-------------|

| | |
|----------------------------------|------------------|
| Colour consistency (SDCM) | SDCM<6 |
|----------------------------------|------------------|

| | |
|------------|---------------|
| CRI | >70 |
|------------|---------------|

| | |
|-----------|-------------|
| IK | IK08 |
|-----------|-------------|