


## Voyager II

Lavov Street light from the family Voyager II with a power of 50W and an optics typeT2 . CCT 4000K. With a total lumen output of 7500lm and a luminous efficiency of 150lm/W.DALI driver. Made in die cast aluminum and finished in grey color. IP66 and IK08 degree of protection.

| | |
|---|---|
| **Item code** | **86.OS15.3423.03** |
| **Product type** | **Outdoor** |
| **Category** | **Street lights** |
| **Family** | **Voyager II** |
| **Pictograms** |  |

| **Dimensions** | |
|---|---|
| **Product dimensions (mm)** | **419*182*100MM** |

**Scheme**

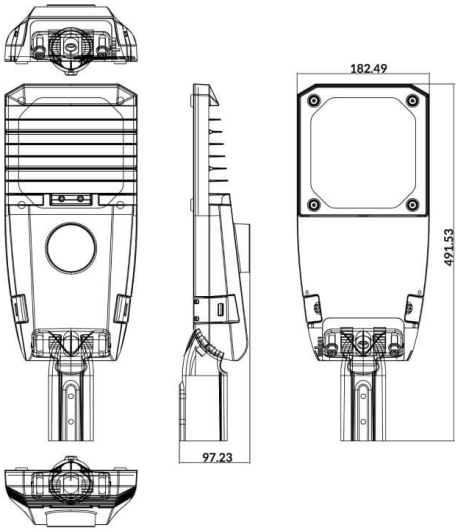


| **Product** | |
|---|---|
| **Real power (W)** | **50** |
| **Real luminous flux (Lm)** | **7500** |
| **Luminous efficiency (Lm/W)** | **150** |
| **Beam angle (º)** | **T2** |
| **Life time (h)** | **70000h L70B10** |
| **IP** | **66** |
| **Electrical class insulation** | **Class I** |
| **Colour** | **grey** |
| **Control gear included** | **yes** |
| **Control gear** | **DALI** |
| **Light source** | **LED** |
| **Type of LED** | **LUMILEDS 3030** |
| **Average life time (h)** | **Up to 100,000hrs LM70,Ta 25°C** |
| **Colour temperature (K)** | **4000** |
| **Colour consistency (SDCM)** | **SDCM6** |
| **CRI** | **>80** |
| **IK** | **IK08** |