





Scheme



Photometry



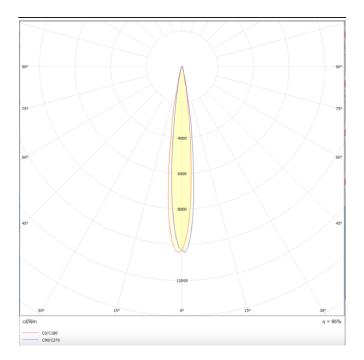

Quadro

Lavov spike spotlight from the family Quadro with a power of 54W and a 25 degrees beam angle. With a CCT of 2700 K. Made of die cast aluminium and finished in grey color. IP66 degree of protection.ON-OFF driver.

| Item code | 86.OSP4.3321.03 Outdoor Spike Spot Light | |
|--------------|--|--|
| Product type | | |
| Category | | |
| Family | Quadro | |
| Pictograms | 220 V SDCM 850° CRI SDCM 3 | |
| | On Off | |
| | 50000h L70B10 65 335° 70° 1K 05 | |

| Product | |
|-----------------------------|-----------------|
| Real power (W) | 54 |
| Real luminous flux (Lm) | 3839 |
| Luminous efficiency (Lm/W) | 71.092592592592 |
| Beam angle (º) | 25 |
| IP | 66 |
| Electrical class insulation | Class I |
| Colour | grey |
| Control gear included | YES |
| Control gear | ON-OFF |
| Light source | LED |
| Type of LED | OSRAM |
| Average life time (h) | 50000h L70B10 |
| Colour temperature (K) | 3000 |
| Colour consistency (SDCM) | SDCM<3 |
| CRI | 80 |
| IK | IK08 |