



**FACADE**


Lavov Linear light from the family Facade with a power of 12 W and Single color color. Beam angle 40o degrees. Made in Aluminium and stainless steel. With a real lumen output of 179.1. Finished in grey color. Not include driver.

|                     |                        |
|---------------------|------------------------|
| <b>Item code</b>    | <b>86.OW08.1320.03</b> |
| <b>Product type</b> | <b>Outdoor</b>         |
| <b>Category</b>     | <b>Linear Light</b>    |
| <b>Family</b>       | <b>FACADE</b>          |

**Pictograms**

|  |  |  |  |  |
|--|--|--|--|--|
|  |  |  |  |  |
|  |  |  |  |  |

**Scheme**

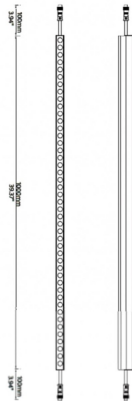

|                                    |                      |
|------------------------------------|----------------------|
| <b>Product</b>                     |                      |
| <b>Real power (W)</b>              | <b>12</b>            |
| <b>Real luminous flux (Lm)</b>     | <b>179.1</b>         |
| <b>Beam angle (°)</b>              | <b>40</b>            |
| <b>IP</b>                          | <b>65</b>            |
| <b>Electrical class insulation</b> | <b>Class III</b>     |
| <b>Operating temperature</b>       | <b>-35-60o</b>       |
| <b>Colour</b>                      | <b>grey</b>          |
| <b>Control gear included</b>       | <b>NOT</b>           |
| <b>Light source</b>                | <b>LED</b>           |
| <b>Type of LED</b>                 | <b>48 CREE SMD</b>   |
| <b>Average life time (h)</b>       | <b>80000h L70B10</b> |
| <b>Colour temperature (K)</b>      | <b>W</b>             |
| <b>Colour consistency (SDCM)</b>   | <b>SDCM&lt;3</b>     |