

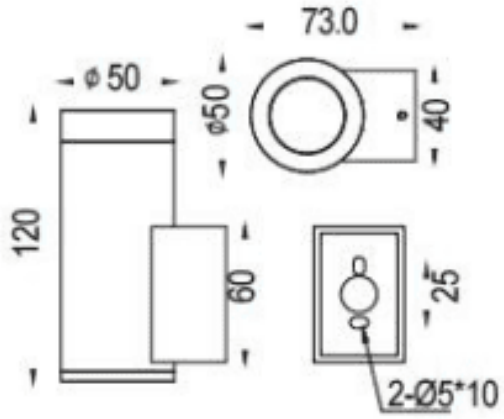
## DOWNT

Lavov wall fixture from the family DOWNT with a power of 4.5W and a 24 degrees beam angle. Finished in White colour.Dimensions ø50x73x120mm.. With a total lumen output of 457lm and a luminous efficiency of 81lm/W. CCT 3000K. Driver ON-OFF. Made in Die Cast Aluminium Body, Tempered Glass Cover .IP65. IK05

| | |
|---|---|
| **Item code** | **86.OW08.1321.01** |
| **Product type** | **Outdoor** |
| **Category** | **Wall Light** |
| **Family** | **DOWNT** |
| **Pictograms** |  |

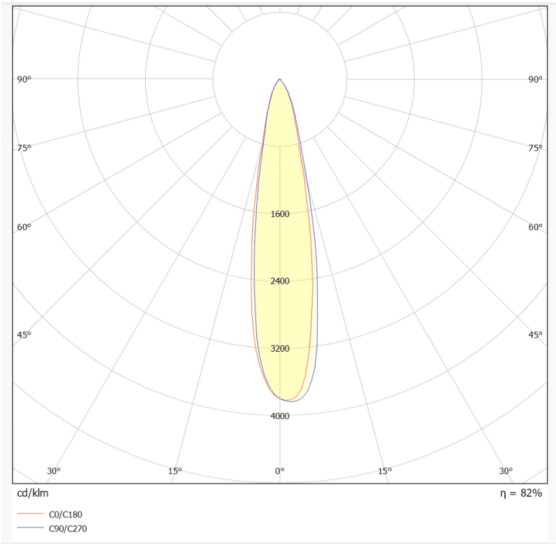
| **Dimensions** | |
|---|---|
| **Product dimensions (mm)** | **ø50x73x120mm** |

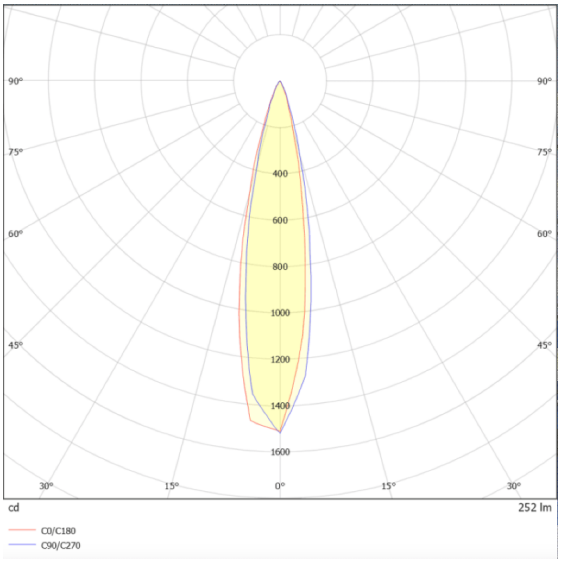
**Scheme**




| **Product** | |
|---|---|
| **Real power (W)** | **4.5** |
| **Real luminous flux (Lm)** | **457** |
| **Luminous efficiency (Lm/W)** | **81** |
| **Beam angle (º)** | **24** |
| **Life time (h)** | **50000h L70B10** |
| **IP** | **IP65** |
| **Electrical class insulation** | **Class I** |
| **Colour** | **White** |
| **Control gear included** | **Yes** |
| **Control gear** | **ON-OFF** |
| **Light source** | **LED** |
| **Type of LED** | **COB** |
| **Colour temperature (K)** | **3000** |
| **Colour consistency (SDCM)** | **SDCM3** |
| **CRI** | **80** |
| **IK** | **IK05** |

## Photometry


90°
75°
60°
45°
1600
2400
3200
4000
30°
15°
0°
cd/klm
η = 82%
C0/C180
C90/C270


90°
75°
60°
45°
400
600
800
1000
1200
1400
1600
30°
15°
0°
cd
252 lm
C0/C180
C90/C270