




Dimensions

Product dimensions (mm) 32x83x1000mm

Scheme

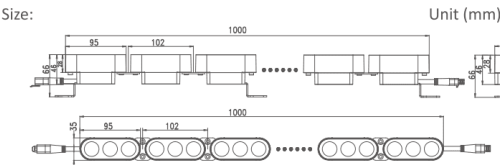

FACADE

Lavov outdoor spot light from the family Snake 3SC with a power of 24W and a 60 degrees beam angle. Surface mounted installation With a total lumen output of 1800lm and a luminous efficiency of 75lm/W. Driver ON-OFF not included .Made in Die cast aluminum body + PC transparent cover. Powder coated,. Class III issolation. IP65 and IK08 . Mains voltage DC 24V. Finished in grey colour. CCT 3000K.CRI80

|              |                 |                  |           |           |    |
|--------------|-----------------|------------------|-----------|-----------|----|
| Item code    | 86.OW08.1350.03 |                  |           |           |    |
| Product type | Outdoor         |                  |           |           |    |
| Category     | Linear Light    |                  |           |           |    |
| Family       | FACADE          |                  |           |           |    |
| Pictograms   | 50<br>60<br>Hz  | 850°             | CRI<br>80 | SDCM<br>3 | CE |
|              | Driver<br>EXCL. | 50000h<br>L70B10 | IP<br>65  | IK<br>08  |    |

|                             |               |
|-----------------------------|---------------|
| Product                     |               |
| Real power (W)              | 24            |
| Real luminous flux (Lm)     | #VALUE!       |
| Luminous efficiency (Lm/W)  | 75            |
| Beam angle (°)              | 60            |
| Life time (h)               | 50000h L70B10 |
| IP                          | 65            |
| Electrical class insulation | Class III     |
| Electrical feeding          | DC 24V        |
| Colour                      | grey          |
| Control gear included       | not included  |
| Control gear                | ON-OFF        |
| Power Factor                | ON-OFF        |
| Flicker Free                | ON-OFF        |
| Light source                | LED           |
| Type of LED                 | Osram 3030    |
| Average life time (h)       | 50000h L70B10 |
| Colour temperature (K)      | 3000          |
| Colour consistency (SDCM)   | SDCM3         |
| CRI                         | 80            |
| IK                          | 8             |