

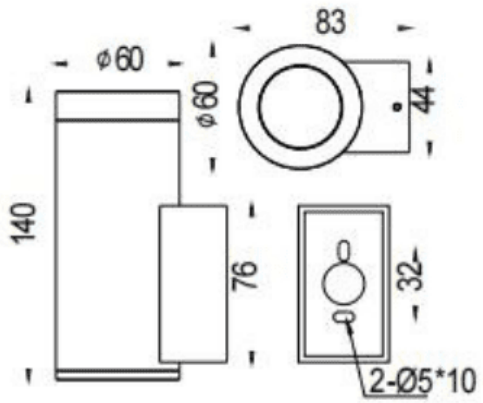
## DOWNT

Lavov wall fixture from the family DOWNT with a power of 10W and a 24 degrees beam angle. Finished in Grey colour.Dimensions Ø60X83X140mm.. With a total lumen output of 800lm and a luminous efficiency of 80lm/W. CCT 3000K. Driver DALI. Made in Die Cast Aluminium Body, Tempered Glass Cover .IP65. IK05

| | |
|---|---|
| **Item code** | **86.OW08.2323.03** |
| **Product type** | **Outdoor** |
| **Category** | **Wall Light** |
| **Family** | **DOWNT** |
| **Pictograms** |  |

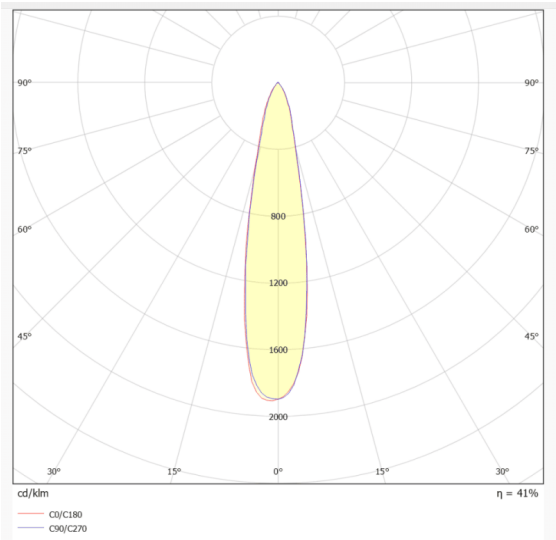
| **Dimensions** | |
|---|---|
| **Product dimensions (mm)** | **Ø60X83X140mm** |

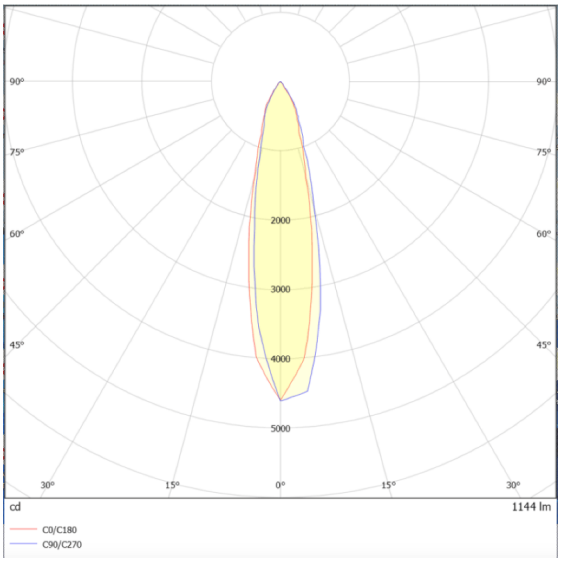
**Scheme**




| **Product** | |
|---|---|
| **Real power (W)** | **10** |
| **Real luminous flux (Lm)** | **800** |
| **Luminous efficiency (Lm/W)** | **80** |
| **Beam angle (º)** | **24** |
| **Life time (h)** | **50000h L70B10** |
| **IP** | **IP65** |
| **Electrical class insulation** | **Class I** |
| **Colour** | **Grey** |
| **Control gear included** | **Yes** |
| **Control gear** | **DALI** |
| **Light source** | **LED** |
| **Type of LED** | **COB** |
| **Colour temperature (K)** | **3000** |
| **Colour consistency (SDCM)** | **SDCM3** |
| **CRI** | **80** |
| **IK** | **IK05** |

## Photometry


90°
75°
60°
45°
800
1200
1600
2000
30°
15°
0°
cd/klm
η = 41%
C0/C180
C90/C270


90°
75°
60°
45°
2000
3000
4000
5000
30°
15°
0°
cd
1144 lm
C0/C180
C90/C270