


| Dimensions | |
|---|---|
| **Product dimensions (mm)** | **ø53x73x160mm** |

**Scheme**

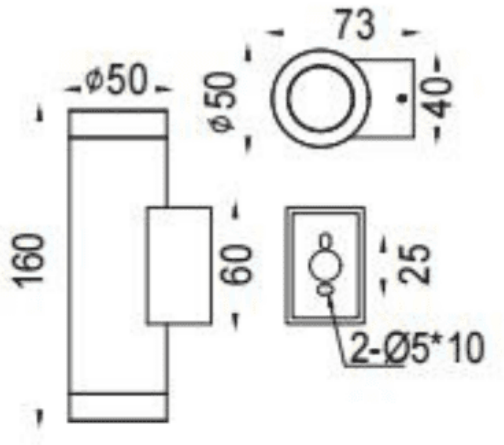


## UP&DOWNT


Lavov wall fixture from the family UP&DOWNT with a power of 2x4W and a 15 degrees beam angle. Finished in Grey colour.Dimensions ø53x73x160mm.. With a total lumen output of 2x285lm and a luminous efficiency of 74.5lm/W. CCT 3000K. Driver DALI. Made in Die Cast Aluminium Body, Tempered Glass Cover .IP65. IK05

| | |
|---|---|
| **Item code** | **86.OW09.1313.03** |
| **Product type** | **Outdoor** |
| **Category** | **Wall Light** |
| **Family** | **UP&DOWNT** |
| **Pictograms** |  |



| Product | |
|---|---|
| **Real power (W)** | **2x4** |
| **Real luminous flux (Lm)** | **2x285** |
| **Luminous efficiency (Lm/W)** | **74.5** |
| **Beam angle (º)** | **15** |
| **Life time (h)** | **50000h L70B10** |
| **IP** | **IP65** |
| **Electrical class insulation** | **Class I** |
| **Colour** | **Grey** |
| **Control gear included** | **Yes** |
| **Control gear** | **DALI** |
| **Light source** | **LED** |
| **Type of LED** | **COB** |
| **Colour temperature (K)** | **3000** |
| **Colour consistency (SDCM)** | **SDCM3** |
| **CRI** | **80** |
| **IK** | **IK05** |

## Photometry

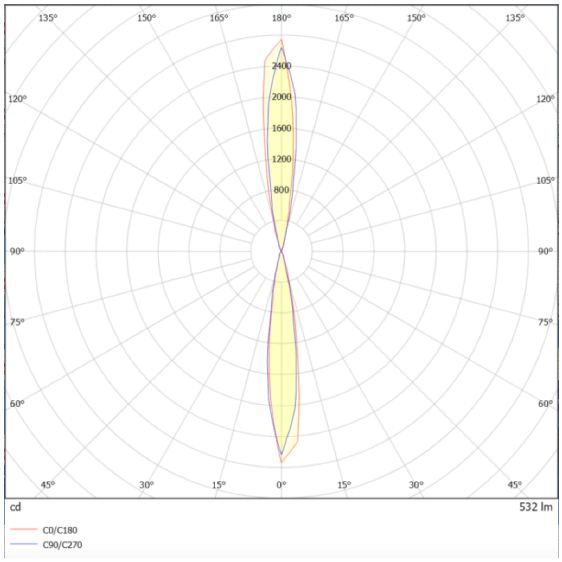
135°
150°
165°
180°
165°
150°
135°
120°
120°
105°
105°
90°
90°
75°
75°
60°
60°
45°
30°
15°
0°
15°
30°
45°
2400
2000
1600
1200
800
cd
532 lm
C0/C180
C90/C270