





Scheme

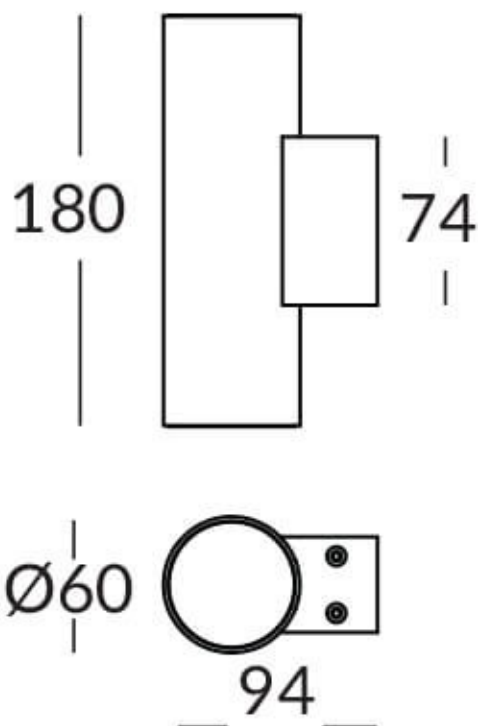

Photometry

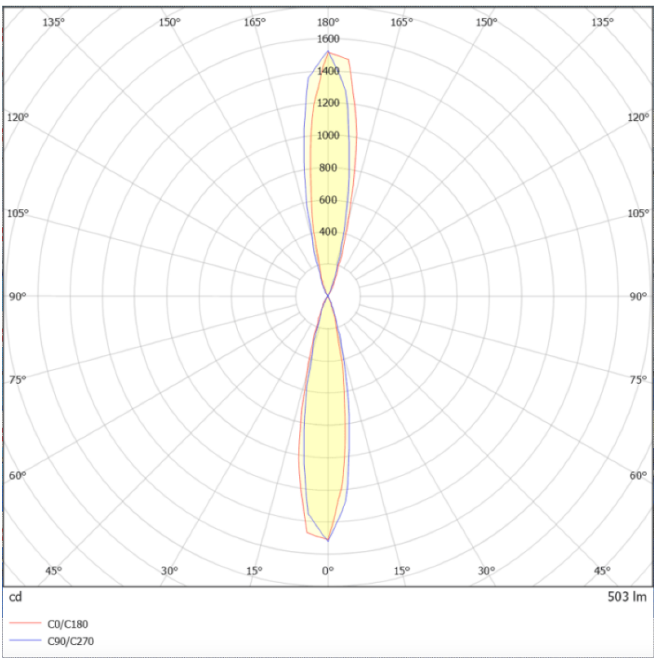

UP&DOWNNT

UP&DOWNNT is a wall light with round design emitting light up and down. With a size of Ø60mmx180mm has a power of 2x4,5W and two reflectors up&down of 24 degrees beam angle. With a real lumen output of 508lm, and an efficiency of 56.44lm/W. Is made in Die Cast Aluminium Body, Tempered Glass Cover and has an IP65 and an IK10 degree of protection. ON-OFF driver. Finished in Black color.

| | |
|--------------|---|
| Item code | 86.OW09.1321.02 |
| Product type | Outdoor |
| Category | Wall Light |
| Family | UP&DOWNNT |
| Pictograms | <div><div></div><div>50 60 Hz</div><div>220 240 V</div><div></div><div>850°</div><div>CRI 80</div></div> <div><div>SDCM 3</div><div>CE</div><div>Driver INCL.</div><div></div><div>50000h L70B10</div></div> <div><div>IP 65</div><div>IK 05/10</div></div> |

| | |
|-----------------------------|---------------|
| Product | |
| Real power (W) | 4.5 |
| Real luminous flux (Lm) | 508 |
| Luminous efficiency (Lm/W) | 56.44 |
| Beam angle (°) | 24 |
| Life time (h) | 50000h L70B10 |
| IP | 65 |
| Electrical class insulation | Class I |
| Colour | Black |
| Chip Brand | NICHIA |
| Control gear included | Yes |
| Control gear | ON-OFF |
| Colour temperature (K) | 3000 |
| Colour consistency (SDCM) | SDCM<3 |
| CRI | 80 |
| IK | IK10 |