





## Scheme





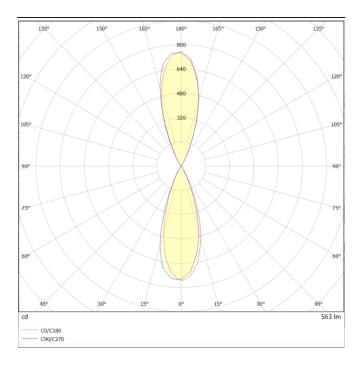

## **UP&DOWNT**

UP&DOWNT is a wall light with round design emitting light up and down. With a size of Ø60mmx180mm has a power of 2x4,5W and two reflectors up&down of 38 degrees beam angle. With a real lumen output of 508lm, and an efficiency of 56.44lm/W. Is made in Die Cast Aluminium Body, Tempered Glass Cover and has an IP65 and an IK10 degree of protection. DALI driver. Finished in White color.

| Item code    | 86.OW09.1333.01 Outdoor Wall Light       |  |
|--------------|--|--|
| Product type |  |  |
| Category     |  |  |
| Family       | UP&DOWNT                                 |  |
| Pictograms   | 50 Hz 220 V                              |  |
|              | SDCM<br>3 C €   Driver   50000h   L70B10 |  |
|              | IP IK 65 05/10                           |  |

| Product                     |               |
|-----------------------------|---------------|
| Real power (W)              | 4.5           |
| Real luminous flux (Lm)     | 508           |
| Luminous efficiency (Lm/W)  | 56.44         |
| Beam angle (º)              | 38            |
| Life time (h)               | 50000h L70B10 |
| IP                          | 65            |
| Electrical class insulation | Class I       |
| Colour                      | White         |
| Chip Brand                  | NICHIA        |
| Control gear included       | Yes           |
| Control gear                | DALI          |
| Colour temperature (K)      | 3000          |
| Colour consistency (SDCM)   | SDCM<3        |
| CRI                         | 80            |
| IK                          | IK10          |