




Scheme



Photometry

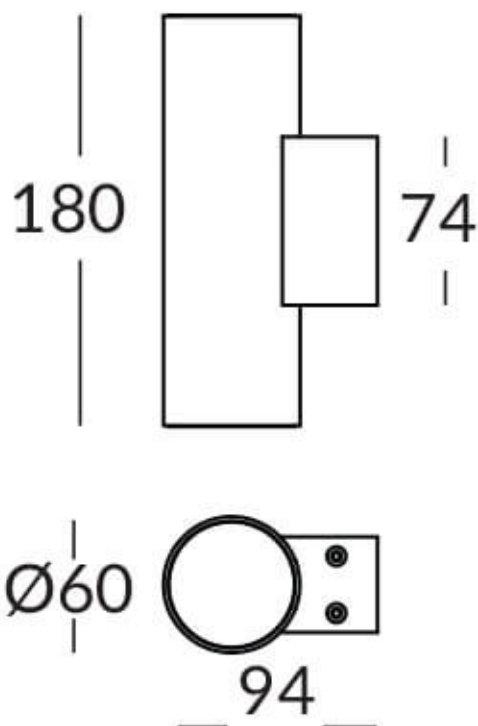

UP&DOWNNT

UP&DOWNNT is a wall light with round design emitting light up and down. With a size of Ø60mmx180mm has a power of 2x4,5W and two reflectors up&down of 24 degrees beam angle. With a real lumen output of 508lm, and an efficiency of 56.44lm/W. Is made in Die Cast Aluminium Body, Tempered Glass Cover and has an IP65 and an IK10 degree of protection. DALI driver. Finished in Grey color.

Item code	86.OW09.1333.03
Product type	Outdoor
Category	Wall Light
Family	UP&DOWNNT
Pictograms	<div><div></div><div>50 60 Hz</div><div>220 240 V</div><div></div><div>850°</div><div>CRI 80</div></div> <div><div>SDCM 3</div><div>CE</div><div>Driver INCL.</div><div></div><div>50000h L70B10</div></div> <div><div>IP 65</div><div>IK 05/10</div></div>

Product	
Real power (W)	4.5
Real luminous flux (Lm)	508
Luminous efficiency (Lm/W)	56.44
Beam angle (°)	24
Life time (h)	50000h L70B10
IP	65
Electrical class insulation	Class I
Colour	Grey
Chip Brand	NICHIA
Control gear included	Yes
Control gear	DALI
Colour temperature (K)	3000
Colour consistency (SDCM)	SDCM<3
CRI	80
IK	IK10