

## UP&DOWNT

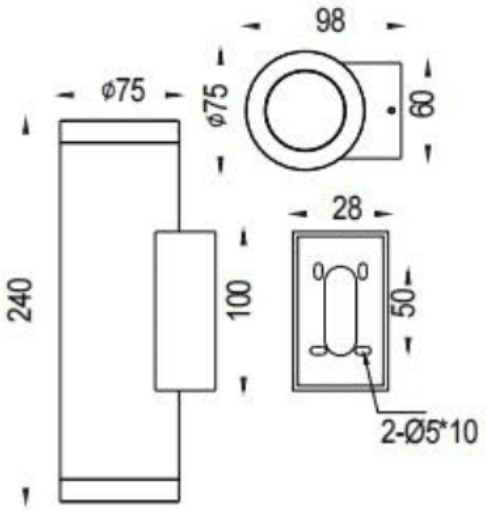
Lavov wall fixture from the family UP&DOWNT with a power of 2x12.5W and a 12 degrees beam angle. Finished in White colour.Dimensions ø75x98x240mm.. With a total lumen output of 2x1082lm and a luminous efficiency of 86.56lm/W. CCT 3000K. Driver ON-OFF. Made in Die Cast Aluminium Body, Tempered Glass Cover .IP65. IK05

| | |
|---|---|
| **Item code** | **86.OW09.3311.01** |
| **Product type** | **Outdoor** |
| **Category** | **Wall Light** |
| **Family** | **UP&DOWNT** |
| **Pictograms** |  |



| **Dimensions** | |
|---|---|
| **Product dimensions (mm)** | **ø75x98x240mm** |

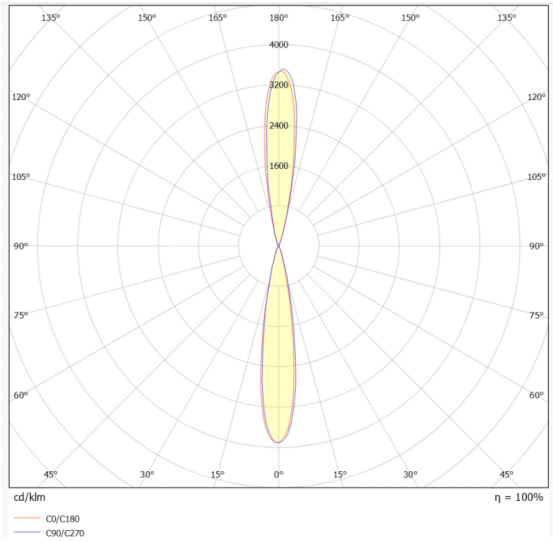
**Scheme**

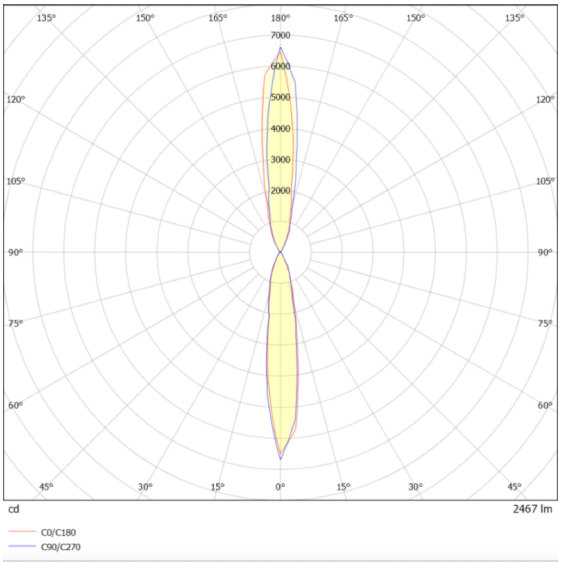




| **Product** | |
|---|---|
| **Real power (W)** | **2x12.5** |
| **Real luminous flux (Lm)** | **2x1082** |
| **Luminous efficiency (Lm/W)** | **86.56** |
| **Beam angle (º)** | **12** |
| **Life time (h)** | **50000h L70B10** |
| **IP** | **IP65** |
| **Electrical class insulation** | **Class I** |
| **Colour** | **White** |
| **Control gear included** | **Yes** |
| **Control gear** | **ON-OFF** |
| **Light source** | **LED** |
| **Type of LED** | **COB** |
| **Colour temperature (K)** | **3000** |
| **Colour consistency (SDCM)** | **SDCM3** |
| **CRI** | **80** |
| **IK** | **IK05** |

## Photometry


135° 150° 165° 180° 165° 150° 135°
4000
3200
2400
1600
120° 120°
105° 105°
90° 90°
75° 75°
60° 60°
45° 30° 15° 0° 15° 30° 45°
cd/klm
η = 100%
C0/C180
C90/C270


135° 150° 165° 180° 165° 150° 135°
7000
6000
5000
4000
3000
2000
120° 120°
105° 105°
90° 90°
75° 75°
60° 60°
45° 30° 15° 0° 15° 30° 45°
cd
2467 lm
C0/C180
C90/C270