




Scheme



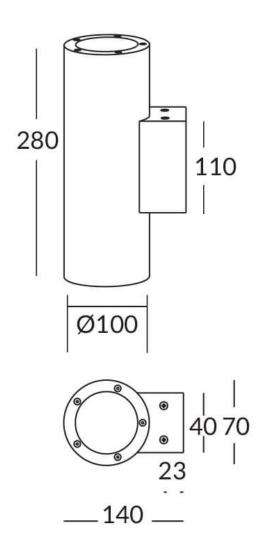

UP&DOWNT

UP&DOWNT is a wall light with round design emitting light up and down. With a size of Ø100mmx280mm has a power of 2x12W and two reflectors up&down of 12 degrees beam angle. With a real lumen output of 2158lm, and an efficiency of 89.92lm/W. Is made in Die Cast Aluminium Body, Tempered Glass Cover and has an IP65 and an IK10 degree of protection. ON-OFF driver. Finished in Grey color.

| Item code | 86.0W09.3311.03 | | | | |
|--------------|-----------------|-------------|-----------------|------------|---------------------------|
| Product type | Outdoor | | | | |
| Category | Wall Light | | | | |
| Family | UP&DOWNT | | | | |
| Pictograms | | 50 60 Hz | 220 240 V | ≥ 850° | CRI 80 |
| | SDCM 3 | CE | Driver INCL. | | 50000h L70 B 10 |
| | IP 65 | IK 05/10 | | | |

| Product | | | |
|-----------------------------|---------------|--|--|
| Real power (W) | 12 | | |
| Real luminous flux (Lm) | 2158 | | |
| Luminous efficiency (Lm/W) | 89.92 | | |
| Beam angle (º) | 12 | | |
| Life time (h) | 50000h L70B10 | | |
| IP | 65 | | |
| Electrical class insulation | Class I | | |
| Colour | Grey | | |
| Chip Brand | NICHIA | | |
| Control gear included | Yes | | |
| Control gear | ON-OFF | | |
| Colour temperature (K) | 3000 | | |
| Colour consistency (SDCM) | SDCM<3 | | |
| CRI | 80 | | |
| IK | IK10 | | |

Photometry 135° 1359 120 2467 lm C0/C180 C90/C270