






Scheme

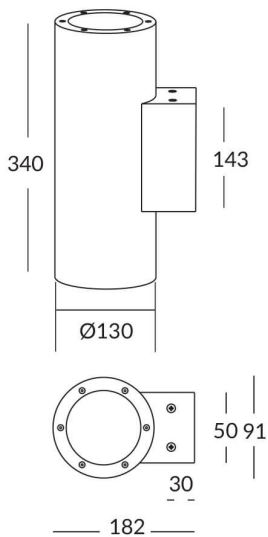

Photometry

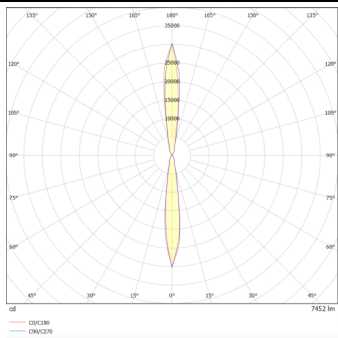

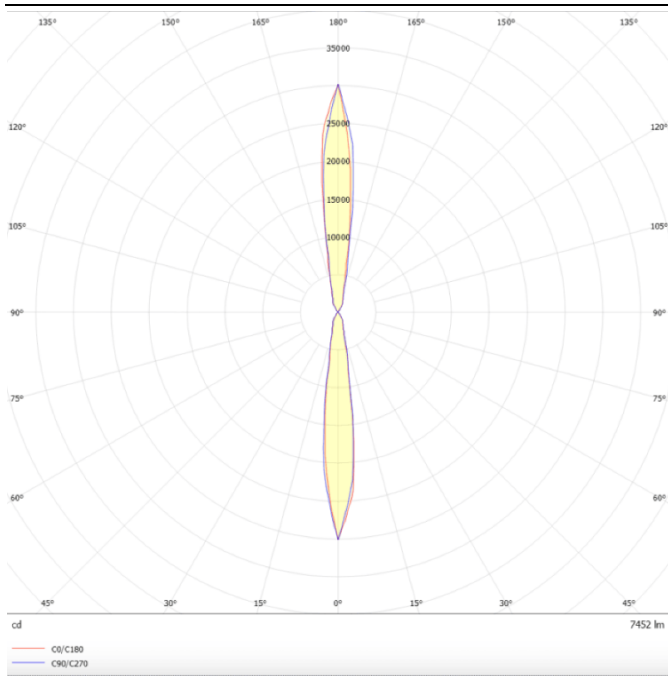

UP&DOWN TUBE

UP&DOWN TUBE is a wall light with round design emitting light up and down. With a size of Ø130mmx340mm has a power of 2x18W and two reflectors up&down of 10 degrees beam angle. With a real lumen output of 3234lm, and an efficiency of 89.83lm/W. Is made in Die Cast Aluminium Body, Tempered Glass Cover and has an IP65 and an IK10 degree of protection. DALI driver. Finished in White color.

| | |
|--------------|--|
| Item code | 86.OW09.4313.01 |
| Product type | Indoor |
| Category | Wall Light |
| Family | UP&DOWN TUBE |
| Pictograms | <div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div> |

| | |
|-----------------------------|---------------|
| Product | |
| Real power (W) | 18 |
| Real luminous flux (Lm) | 3234 |
| Luminous efficiency (Lm/W) | 89.83 |
| Beam angle (°) | 10 |
| Life time (h) | 50000h L70B10 |
| IP | 65 |
| Electrical class insulation | Class I |
| Colour | White |
| Control gear included | Yes |
| Control gear | DALI |
| Colour temperature (K) | 3000 |
| Colour consistency (SDCM) | SDCM<3 |
| CRI | 80 |
| IK | 10 |