



## UP&DOWNT

Lavov wall fixture from the family UP&DOWNT with a power of 2x18W and a 60 degrees beam angle. Finished in Black colour.Dimensions ø100x125x280mm.. With a total lumen output of 2x1788lm and a luminous efficiency of 93.3lm/W. CCT 3000K. Driver DALI. Made in Die Cast Aluminium Body, Tempered Glass Cover .IP65. IK05

| | |
|---|---|
| **Item code** | **86.OW09.4343.03** |
| **Product type** | **Outdoor** |
| **Category** | **Wall Light** |
| **Family** | **UP&DOWNT** |
| **Pictograms** |  |


| **Dimensions** | |
|---|---|
| **Product dimensions (mm)** | **ø100x125x280mm** |

**Scheme**

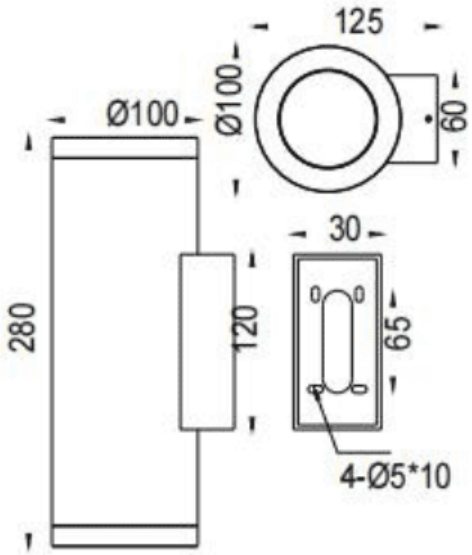


| **Product** | |
|---|---|
| **Real power (W)** | **2x18** |
| **Real luminous flux (Lm)** | **2x1788** |
| **Luminous efficiency (Lm/W)** | **93.3** |
| **Beam angle (º)** | **60** |
| **Life time (h)** | **50000h L70B10** |
| **IP** | **IP65** |
| **Electrical class insulation** | **Class I** |
| **Colour** | **Black** |
| **Control gear included** | **Yes** |
| **Control gear** | **DALI** |
| **Light source** | **LED** |
| **Type of LED** | **COB** |
| **Colour temperature (K)** | **3000** |
| **Colour consistency (SDCM)** | **SDCM3** |
| **CRI** | **80** |
| **IK** | **IK05** |

## Photometry

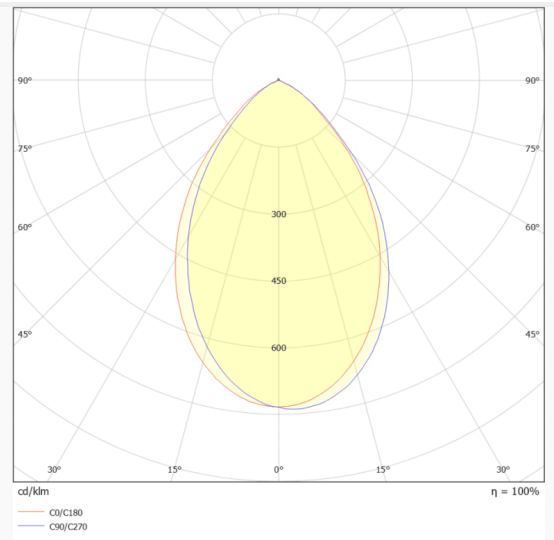
90°
90°
75°
75°
60°
60°
45°
45°
300
450
600
30°
15°
0°
15°
30°
cd/klm
η = 100%
C0/C180
C90/C270