





Scheme



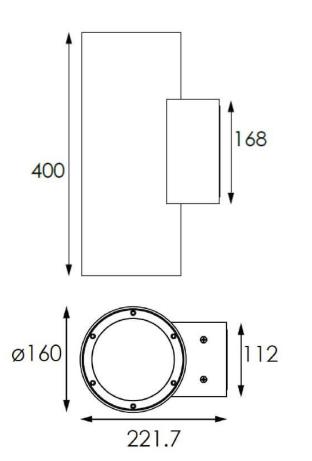

Photometry



UP&DOWNT

UP&DOWNT is a wall light with round design emitting light up and down. With a size of Ø160mmx400mm has a power of 2x30W and two reflectors up&down of 38 degrees beam angle. With a real lumen output of 6354lm, and an efficiency of 105.9lm/W. Is made in Die Cast Aluminium Body, Tempered Glass Cover and has an IP65 and an IK10 degree of protection. ON-OFF driver. Finished in Grey color.

Item code	86.OW09.5331.03 Outdoor	
Product type		
Category	Wall Light	
Family	UP&DOWNT	
Pictograms	50 Hz 220 V S50* CRI 80	
	SDCM 3 C € Driver INCL. 50000h L70B10	
	IP IK 65 05/10	

Product	
Real power (W)	30
Real luminous flux (Lm)	6354
Luminous efficiency (Lm/W)	105.9
Beam angle (º)	38
Life time (h)	50000h L70B10
IP	65
Electrical class insulation	Class I
Colour	Grey
Chip Brand	NICHIA
Control gear included	Yes
Control gear	ON-OFF
Colour temperature (K)	3000
Colour consistency (SDCM)	SDCM<3
CRI	80
IK	IK10

