



Down S

Lavov wall fixture from the family Down S with a power of 4.5W and a 24 degrees beam angle. Finished in grey colour. Dimensions 50X73X120mm.. With a total lumen output of 457lm and a luminous efficiency of 81.5lm/W. CCT 3000K. Driver On-Off. Made in Die cast aluminium body and tempered glass front cover. .IP65. IK08


|              |                                                                                                                                                                                                           |  |  |  |  |
|--------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|--|--|--|
| Item code    | 86.OW14.1321.03                                                                                                                                                                                           |  |  |  |  |
| Product type | Outdoor                                                                                                                                                                                                   |  |  |  |  |
| Category     | Wall Fixtures                                                                                                                                                                                             |  |  |  |  |
| Family       | Down S                                                                                                                                                                                                    |  |  |  |  |
| Pictograms   | <div><div></div><div>50<br/>60 Hz</div><div></div><div>850°</div><div>CRI<br/>80</div><div>SDCM<br/>3</div><div>CE</div><div>Driver<br/>INCL.</div><div>50000h<br/>L70B10</div><div>IP<br/>65</div></div> |  |  |  |  |

|                             |               |
|-----------------------------|---------------|
| Product                     |               |
| Real power (W)              | 4.5           |
| Real luminous flux (Lm)     | 457           |
| Luminous efficiency (Lm/W)  | 81.5          |
| Beam angle (°)              | 24            |
| Life time (h)               | 50000h L70B10 |
| IP                          | IP65          |
| Electrical class insulation | Clas I        |
| Colour                      | grey          |
| Control gear included       | Yes           |
| Control gear                | On-Off        |
| Power Factor                | >0,9          |
| Flicker Free                | Yes           |
| Light source                | LED           |
| Type of LED                 | COB           |
| Colour temperature (K)      | 3000          |
| Colour consistency (SDCM)   | <5SDCM        |
| CRI                         | 80            |
| IK                          | IK08          |

Dimensions

Product dimensions (mm) 50X73X120mm

Scheme

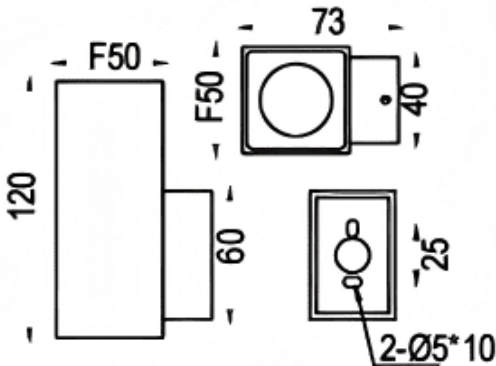

Photometry

